

**PART NR.**

See dimensions table

**COUNTRY OF ORIGIN**

China

**STANDARDS**

REACH and RoHS compliant


Flammability: VW-1

**CHARACTERISTICS**

- Our self-closing braided wrap sleeve is a non-expandable sleeve woven from monofilament (weft) and multifilament (warp) polyester yarns
- It provides lightweight, cost-effective and robust protection for a wide range of components
- Its inherent flexibility allows it to bend, coil and conform to irregular shapes, while the open design allows it to be installed on completed assemblies
- It is widely used in wire harnesses, cable assemblies, flat ribbon cables, tubes and hoses to provide a proper, durable protection in automotive, automatic equipment, railways and panel boards areas
- Cutting tool: hot knife

**SELF-CLOSING NON-EXPANDABLE BRAIDED WRAP**

**PHOTO / TECHNICAL DRAWING**

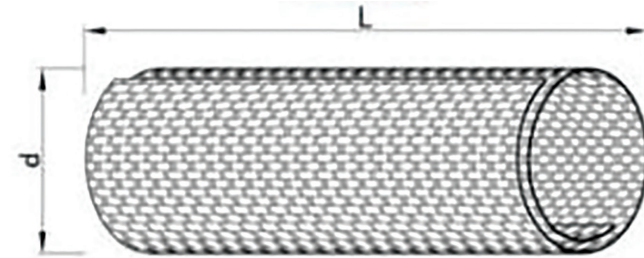

**DIMENSIONS**

Spool			
Part nr.	Inner Ø mm	Max. Ø bundle	Mtrs/spool
SCS-005BK	5	6	100
SCS-008BK	8	9	100
SCS-010BK	10	11	100
SCS-013BK	13	14	50
SCS-016BK	16	17	50
SCS-019BK	19	20	25
SCS-025BK	25	27	25
SCS-029BK	29	31	25
SCS-032BK	32	34	25
SCS-038BK	38	40	25
SCS-050BK	50	52	25

Box			
Part nr.	Inner Ø mm	Max. Ø bundle	Mtrs/box
SCSB-005BK	5	6	10
SCSB-008BK	8	9	10
SCSB-010BK	10	11	10
SCSB-013BK	13	14	10
SCSB-016BK	16	17	8
SCSB-019BK	19	20	8
SCSB-025BK	25	27	8
SCSB-029BK	29	31	5
SCSB-032BK	32	34	5
SCSB-038BK	38	40	5
SCSB-050BK	50	52	5

**TECHNICAL SPECIFICATIONS**

Material:

Polyester, black

Temperature range:

-50 ~ 150 °C