

SINGLE WALL 3:1 HEAT SHRINK SLEEVE - PIECES 1.22 M

PART NR.

See dimensions table

COUNTRY OF ORIGIN:

China

STANDARDS:

REACH and RoHS compliant

Halogen free


Flammability: UL1581 VW-1

UL listed

CHARACTERISTICS:

- AE's single wall heat shrink sleeve is flexible, flame-retardant, polyolefin heat shrinkable tubing
- This shrink sleeve is low smoke generating, abrasion resistant and dioxin-free in case of burning and has excellent electrical and physical properties, including excellent acid and corrosion resistance
- It is suitable for insulation application in automotive electronics, terminal lugs, small electrical parts, lead wires of motors and transformers, etc.
- This product is UL listed

PHOTO / TECHNICAL DRAWING

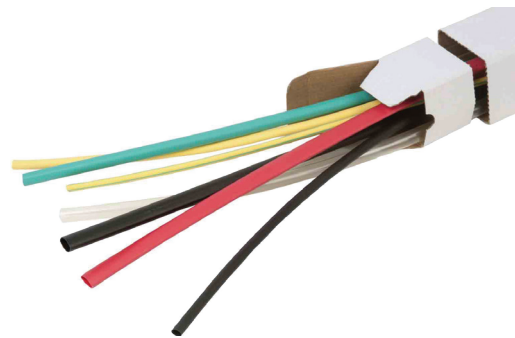

AVAILABLE COLORS

Other color part nr.
Not available in grey
612...BS = black
Not available in green/yellow
614...BS = blue
615...BS = clear
616...BS = white
617...BS = red
618...BS = yellow
619...BS = green
Not available in brown
Not available in orange

DIMENSIONS

Part nr.	Inch	Before Ø in mm	After Ø in mm	Pcs/bag	UL
612001BS	1/16	1,5	0,5	200	✓
612002BS	1/8	3,0	1,0	150	✓
612003BS	3/16	4,5	1,5	100	✓
612004BS	1/4	6,0	2,0	50	✓
612005BS	3/8	9,0	3,0	50	✓
612006BS	1/2	12,0	4,0	30	✓
612007BS	5/8	15,0	5,0	30	✓
612008BS	3/4	18,0	6,0	30	✓
612009BS	1	24,0	8,0	20	✓
612010BS	1 1/4	30,0	10,0	20	✓
612011BS	1 1/2	39,0	13,0	10	✓

TECHNICAL SPECIFICATIONS

Material: Polyolefin
 Shrink ratio: 3:1
 Operating temperature: -55 ~ 125 °C
 Min. shrink temperature: 70 °C
 Fully shrink temperature: 120 °C

Technical Data

Property	Specification Requirement	Test Method	Typical Value
Tensile strength (Room temp.)	Min. 10.4Mpa	UL224	12Mpa
Elongation at break (Room temp.)	Min. 200%	UL224	400%
Tensile strength after aging (158°C 168hrs)	Min. 7.3Mpa	UL224	10.4Mpa
Elongation after aging (158°C 168hrs)	Min. 100%	UL224	300%
Voltage withstand (Un-aged)	Withstand 2.5kV for 1 minute and breakdown	UL224	Pass
Voltage withstand (Aged)	Withstand at least half of un-aged breakdown voltage for 1 minute and breakdown	UL224	Pass
Corrosion (158°C 168hrs)	No corrosion	UL224	No sign of deg.
Longitudinal shrinkage	≤10%	UL224	≤5%
Low-temperature flexibility (-55°C 4hrs)	No cracking	UL224	Pass
Flammability	VW-1	UL1581	Pass
Volume resistivity	Min. 10 ¹⁴ Ω·m	UL224	Pass
Heat shock (250°C 4hrs)	No cracking	ASTM D2671	Pass
Dielectric strength	>19.7kV/mm	ASTM D2671	>25kV/mm