

PART NR.
See dimensions table

COUNTRY OF ORIGIN:
China

STANDARDS:
REACH and RoHS compliant
Halogen free

CHARACTERISTICS:


- AE'S spiral wrap is halogen-free, flexible, polyolefin sleeve.
- It is low smoke generating, abrasion resistant and dioxin free in case of burning.
- This product has excellent electrical and physical properties. It is widely used for cable protection.

PHOTO / TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Material: Polyolefin
Operating temperature: -30 ~ 100 °C

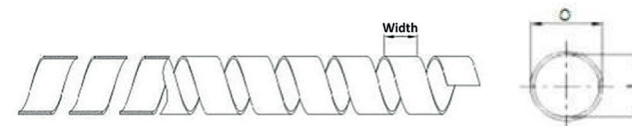

DIMENSIONS

Part nr.	Color	Bundle mm	Inner Ø mm	Outer Ø mm	Width	Mtrs/reel
SW-03	natural	1,5 - 8	2,0 ± 0,2	3,0 ± 0,2	4 ± 1	25
SW-03Z	black	1,5 - 8	2,0 ± 0,2	3,0 ± 0,2	4 ± 1	25
SW-04	natural	4 - 10	2,8 ± 0,2	4,0 ± 0,2	5 ± 1	25
SW-04Z	black	4 - 10	2,8 ± 0,2	4,0 ± 0,2	5 ± 1	25
SW-06	natural	7 - 70	4,8 ± 0,2	6,0 ± 0,2	7 ± 1	25
SW-06Z	black	7 - 70	4,8 ± 0,2	6,0 ± 0,2	7 ± 1	25
SW-08	natural	8 - 80	6,7 ± 0,2	8,0 ± 0,2	11 ± 1	25
SW-08Z	black	8 - 80	6,7 ± 0,2	8,0 ± 0,2	11 ± 1	25
SW-09	natural	10 - 100	8,7 ± 0,2	10,0 ± 0,2	11 ± 1	25
SW-09Z	black	10 - 100	8,7 ± 0,2	10,0 ± 0,2	11 ± 1	25
SW-12	natural	12 - 120	10,6 ± 0,3	12,0 ± 0,3	13 ± 1	25
SW-12Z	black	12 - 120	10,6 ± 0,3	12,0 ± 0,3	13 ± 1	25
SW-14	natural	14 - 140	12,5 ± 0,3	14,0 ± 0,3	14 ± 1	25
SW-14Z	black	14 - 140	12,5 ± 0,3	14,0 ± 0,3	14 ± 1	25
SW-15	natural	16 - 160	14,5 ± 0,4	16,0 ± 0,3	15 ± 1	25
SW-15Z	black	16 - 160	14,5 ± 0,4	16,0 ± 0,3	15 ± 1	25
SW-18	natural	18 - 180	16,0 ± 0,4	18,0 ± 0,4	16 ± 1	25
SW-18Z	black	18 - 180	16,0 ± 0,4	18,0 ± 0,4	16 ± 1	25
SW-20	natural	20 - 200	17,8 ± 0,5	20,0 ± 0,5	17 ± 1	25
SW-20Z	black	20 - 200	17,8 ± 0,5	20,0 ± 0,5	17 ± 1	25
SW-22	natural	22 - 220	20,0 ± 0,5	22,0 ± 0,5	19 ± 1	25
SW-22Z	black	22 - 220	20,0 ± 0,5	22,0 ± 0,5	19 ± 1	25
SW-24	natural	24 - 240	23,0 ± 0,5	24,8 ± 0,5	20 ± 1	25
SW-24Z	black	24 - 240	23,0 ± 0,5	24,8 ± 0,5	20 ± 1	25
SW-25	natural	25 - 250	22,6 ± 0,5	25,0 ± 0,5	21 ± 1	25
SW-25Z	black	25 - 250	22,6 ± 0,5	25,0 ± 0,5	21 ± 1	25
SW-28	natural	28 - 280	25,4 ± 0,5	28,0 ± 0,5	22 ± 1,5	25
SW-28Z	black	28 - 280	25,4 ± 0,5	28,0 ± 0,5	22 ± 1,5	25
SW-30	natural	30 - 300	27,4 ± 0,8	30,0 ± 0,8	23 ± 1,5	25
SW-30Z	black	30 - 300	27,4 ± 0,8	30,0 ± 0,8	23 ± 1,5	25