

PART NR.
AT725SE


COUNTRY OF ORIGIN
China

STANDARDS
REACH and RoHS compliant

CHARACTERISTICS

- Vapor barrier
- Easy to tear
- Low temperature resistance
- Excellent initial tack & adhesion power to irregular surface

PHOTO / TECHNICAL DRAWING

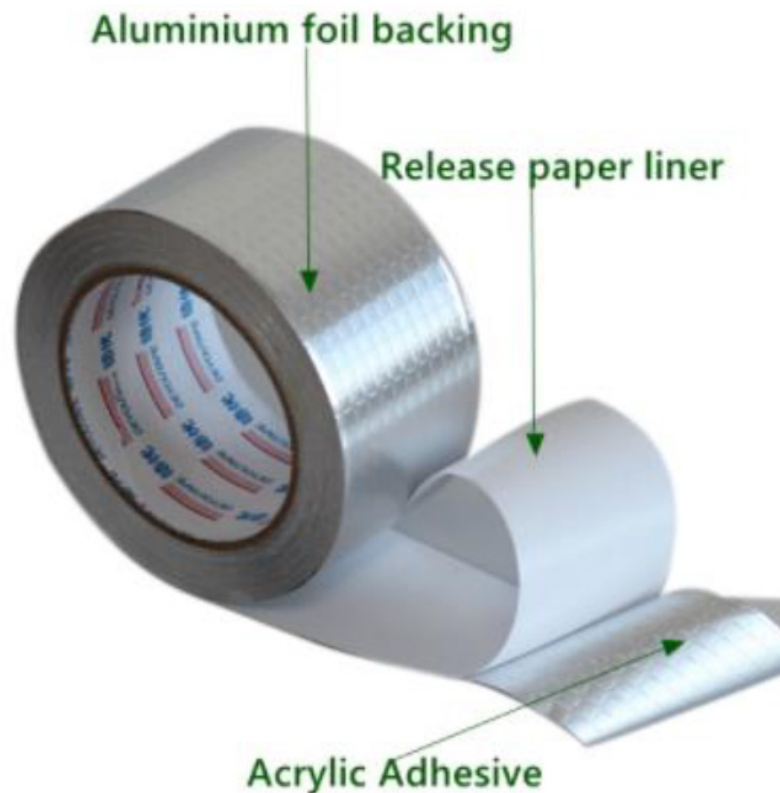

DIMENSIONS

L x W x T: 50 m x 50 mm x 0,05 mm

TECHNICAL SPECIFICATIONS

Backing: Aluminum foil
 Glue: Acrylic adhesive
 Operating temp.: -30 ~ 80°C

Technical Data

Property	Specification Requirement	Test Method	Typical Value
Tensile strength	Min. 40 N/25 mm	ASTM D3759	passed
Peel strength at 180°C	Min. 10 N/25 mm	ISO 29862	passed
Adhesive to steel	Min. 40 N/25 mm	ASTM D3330	passed
Elongation	Min. 3%	ASTM D3759	passed