

# CORD END TERMINAL - TWIN WIRE

**PART NR.**

See dimensions table

"T" = Telemechanique

"W" = Weidmüller

**COUNTRY OF ORIGIN**

Germany

**STANDARDS**


REACH and RoHS compliant

DIN 46228/4

Compliant to EU directives 2002/96/EC (WEEE),

2002/95/EC (ROHS) AND 2003/11/CE

**PHOTO / TECHNICAL DRAWING**

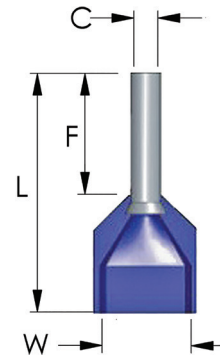

**TECHNICAL SPECIFICATIONS**

Terminal:

Red copper (Cu-ETP),  
electro tin plated

Insulation:

Polypropylene (PP)

Min. coating thickness:

3 µm

Max. temperature:

105 °C

**DIMENSIONS**

Wire range	C	Part nr. "T"	UL	C	Part nr. "W"	UL	C	Part nr. DIN	UL	F	L	C	W	Packed
2 x 0,25 mm <sup>2</sup> 2 x 24 AWG		TAHV 0.25N*			TAHB 0.25N*					8,0	15,0	1,15	3,4	500
2 x 0,34 mm <sup>2</sup> 2 x 22 AWG					TAHT 0.34N*					8,0	15,0	1,15	3,5	500
2 x 0,50 mm <sup>2</sup> 2 x 20 AWG		TAHW 0.50N*	✓		TAHO 0.50N*	✓		TAHW 0.50N*	✓	8,0	15,0	1,4	4,7	500
2 x 0,75 mm <sup>2</sup> 2 x 19 AWG		TAHB 0.75N*	✓		TAHW 0.75N*	✓		TAHGRS 0.75N*	✓	8,0	15,0	1,7	5,0	500
2 x 1,00 mm <sup>2</sup> 2 x 18 AWG		TAHR 1.00N*	✓		TAHG 1.00N*	✓		TAHR 1.00N*	✓	8,0	15,0	1,95	5,4	500
2 x 1,50 mm <sup>2</sup> 2 x 16 AWG		TAHZ 1.50N*	✓		TAHR 1.50N*	✓		TAHZ 1.50N*	✓	8,0	16,0	2,2	6,6	500
2 x 2,50 mm <sup>2</sup> 2 x 14 AWG		TAHGRS 2.50N*	✓		TAHB 2.50N*	✓		TAHB 2.50N*	✓	10,0	18,5	2,8	7,8	250
2 x 4,00 mm <sup>2</sup> 2 x 12 AWG		TAHO 4.00N	✓		TAHGRS 4.00N	✓		TAHGRS 4.00N	✓	12,0	23,0	3,7	8,8	100
2 x 6,00 mm <sup>2</sup> 2 x 10 AWG		TAHGR 6.00N	✓		TAHZ 6.00N			TAHG 6.00N	✓	14,0	26,0	4,8	10,0	100
2 x 10,00 mm <sup>2</sup> 2 x 8 AWG		TAHBR 10.00N	✓		TAHCR 10.00N	✓		TAHR 10.00N	✓	14,0	26,0	6,4	13,0	100
2 x 16,00 mm <sup>2</sup> 2 x 6 AWG		TAHCR 16.00N	✓		TAHGR 16.00N	✓		TAHB 16.00N	✓	14,0	30,0	8,2	18,4	50

\* Also available in 100 pcs bags