

PART NR.
See rating table



COUNTRY OF ORIGIN
Japan

STANDARDS
REACH and RoHS compliant
ISO 8820-8

CHARACTERISTICS

- Meets international specs, complies to ISO 8820-8 and other standards
- UP tube, closed with epoxy resin laser marked, silica sand filled
- Rigid Sn-plated copper connections
- M10 connection holes, spaced 80 mm
- Maximum torque 16Nm ± 1Nm
- Breaking capacity: 30.000 A at 500 Vdc

PHOTO / TECHNICAL DRAWING

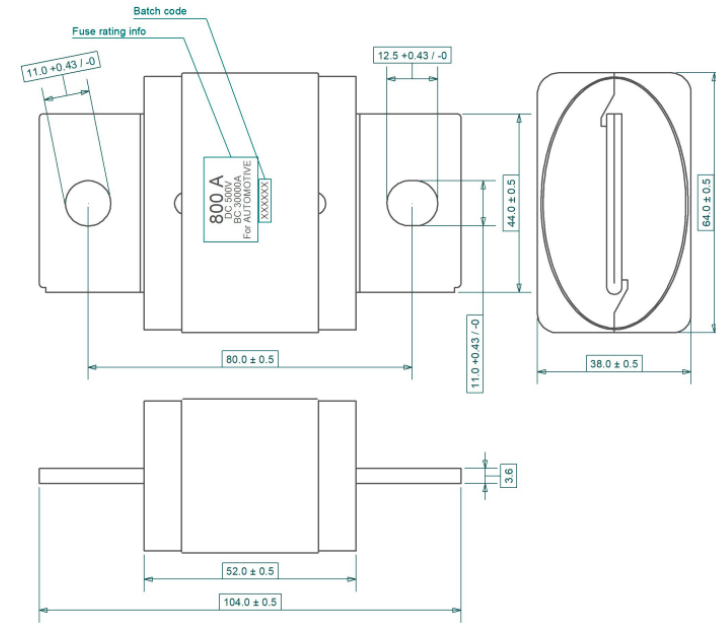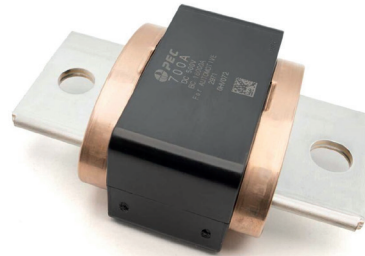

DIMENSIONS

L x W x H: 52 (+52) x 64 x 38 mm

RATING TABLE

Part nr.	Rating (A)	Rating (V)	Holes
EV29-600-M10	600	500	M10
EV29-700-M10	700	500	M10
EV29-800-M10	800	500	M10
EV29-900-M10	900	500	M10
EV29-1000-M10	1000	500	M10

TECHNICAL SPECIFICATIONS

Body: Unsaturated polyester (UP) tube, silica sand filled, closed with epoxy resin
 Element: Copper
 Connections: Copper, tin plated
 Hole size: M10, spaced 80 mm
 Operating temp.: -40 ~ 100 °C
 Max. torque: 16 ± 1 Nm
 Breaking capacity: 30000A@500Vdc