


PART NR.
See rating table

COUNTRY OF ORIGIN
Japan

STANDARDS
REACH and RoHS compliant
ISO 8820-8

- CHARACTERISTICS**
- Meets international specs, complies to ISO 8820-8 and other standards
 - UP tube, closed with epoxy resin laser marked, silica sand filled
 - Rigid copper connections
 - M8 connection holes, spaced 74,8 mm
 - Maximum torque 12Nm ± 1 Nm
 - Breaking capacity: 16.000 A at 500 Vdc

PHOTO / TECHNICAL DRAWING

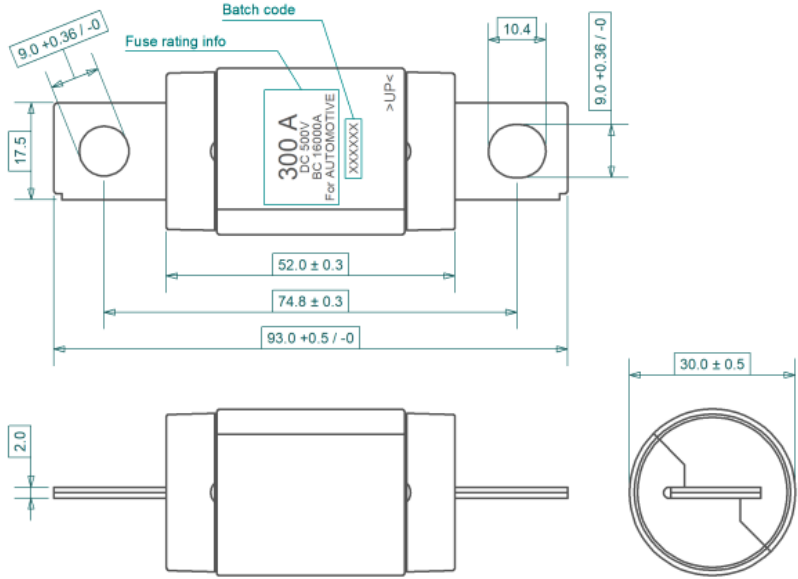

DIMENSIONS

L x Ø: 52 (+41) x 30 mm

RATING TABLE

Part nr.	Rating (A)	Rating (V)	Holes
EV29-150-M8	150	500	M8
EV29-175-M8	175	500	M8
EV29-200-M8	200	500	M8
EV29-225-M8	225	500	M8
EV29-250-M8	250	500	M8
EV29-300-M8	300	500	M8

TECHNICAL SPECIFICATIONS

Body: Unsaturated polyester (UP) tube, silica sand filled, closed with epoxy resin
 Element: Copper
 Connections: Copper
 Hole size: M8, spaced 74,8 mm
 Operating temp.: -40 ~ 85 °C
 Max. torque: 12 ± 1 Nm
 Breaking capacity: 16000A@500Vdc