

megaOTO BOLT-ON FUSE - OMGHV SERIES

PART NR.
See rating table


COUNTRY OF ORIGIN
Italy

STANDARDS
REACH and RoHS compliant
ISO 20934

CHARACTERISTICS

- Meets international specs, complies to ISO 20934 and other standards
- Rigid tin plated copper blades
- Sturdy riveted thermoplastic color coded housing
- M8 connection holes, spaced 51 mm
- Rating indication in OCR font, both sides
- Breaking capacity of 2500A at 70VDC
- Maximum torque 12 ± 1 Nm

PHOTO / TECHNICAL DRAWING

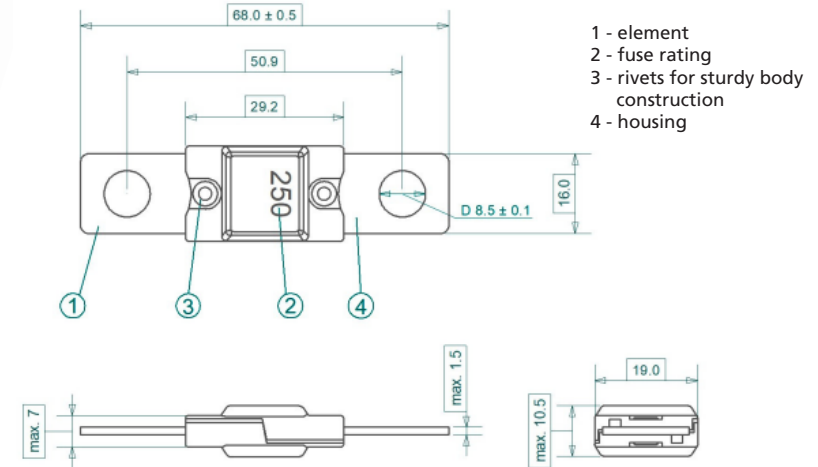

DIMENSIONS

L x W x H: 29,2 (+38,8) x 19 x 10,5 mm

RATING TABLE

Part nr.	Color	Rating (A)	Rating (V)	Holes
OMGHV080	red	80	70	M8
OMGHV100	yellow	100	70	M8
OMGHV125	green	125	70	M8
OMGHV150	orange	150	70	M8
OMGHV175	white	175	70	M8
OMGHV200	blue	200	70	M8
OMGHV225	tan	225	70	M8
OMGHV250	pink	250	70	M8
OMGHV300	grey	300	70	M8
OMGHV350	dark green	350	70	M8
OMGHV400	purple	400	70	M8
OMGHV450	dark yellow	450	70	M8
OMGHV500	brown	500	70	M8

TECHNICAL SPECIFICATIONS

Body: PPA-GF35, color coded
 Element: Cu alloy, tin plated
 Integrated heat sink
 Hole size: M8, spaced 51 mm
 Max. torque: 12 ± 1 Nm
 Breaking capacity: 2500A@70V