

**PART NR.**  
See rating table

**COUNTRY OF ORIGIN**  
Italy


**STANDARDS**  
REACH and RoHS compliant  
DIN ISO 8820-5

- CHARACTERISTICS**
- Meets international specs, complies to ISO 8820-5 standards
  - Clear material on one side ensuring element visibility
  - PA66 & PSU housing, heat & chemical resistant
  - Rigid Sn plated copper alloy blades with amperage indication
  - Color coded housing, marked with amperage rating
  - M5 connection holes, spaced 30 mm
  - Maximum torque 4,5 Nm ± 1 Nm

**PHOTO / TECHNICAL DRAWING**



**midIoT0 BOLT-ON FUSE - OBFMD SERIES 32V**

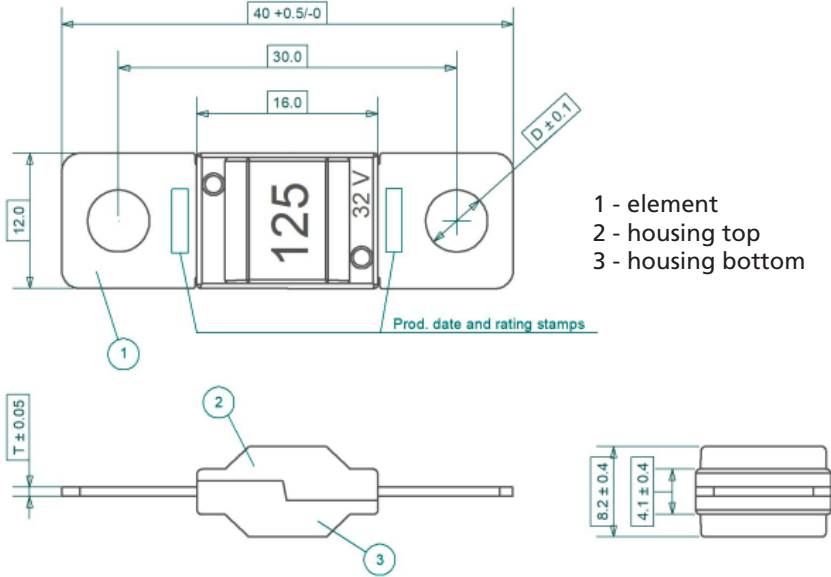

**DIMENSIONS**

L x W x H: 16 (+24) x 12 x 8,2 mm

**RATING TABLE**

Part nr.	Hole size	Color	Rating (A)	Rating (V)
OBFMD025	M5	black	25	32
OBFMD030	M5	orange	30	32
OBFMD040	M5	green	40	32
OBFMD050	M5	red	50	32
OBFMD060	M5	yellow	60	32
OBFMD070	M5	brown	70	32
OBFMD080	M5	white	80	32
OBFMD100	M5	blue	100	32
OBFMD125	M5	pink	125	32
OBFMD150	M6	grey	150	32
OBFMD175	M6	tan	175	32
OBFMD200	M6	violet	200	32

**TECHNICAL SPECIFICATIONS**

Body: PA66-GF25, color coded (top)  
PSU, clear (bottom)  
Element: Cu alloy, Sn plated  
Hole size: M5, spaced 30 mm  
Max. torque: 4,5 ± 1 Nm