japOTO CARTRIDGE FUSE - B SERIES

PART NR.
See rating table

COUNTRY OF ORIGIN
Japan

STANDARDS
REACH and RoHS compliant
ISO 8820-4
JASO D612

CHARACTERISTICS

- Meets international specs, complies to ISO 8820-4, JASO D612 and other standards
- Element visibility from top through transparent cover
- Robust/sturdy body construction
- Self extinguishing, color coded body materials
- High temperature resistive plastics used for fuse body materials
- Secure and controlled time-delayed functioning with purpose designed elements
- Integrated, endurable, Cu alloy blades
- Used in Japanese, European, American and Korean designed vehicles

PHOTO / TECHNICAL DRAWING

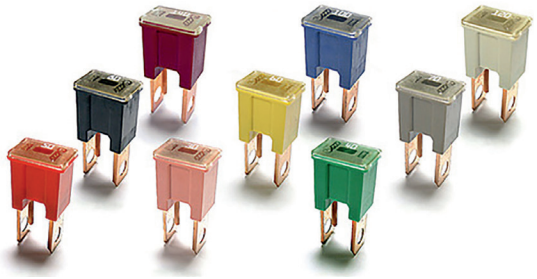

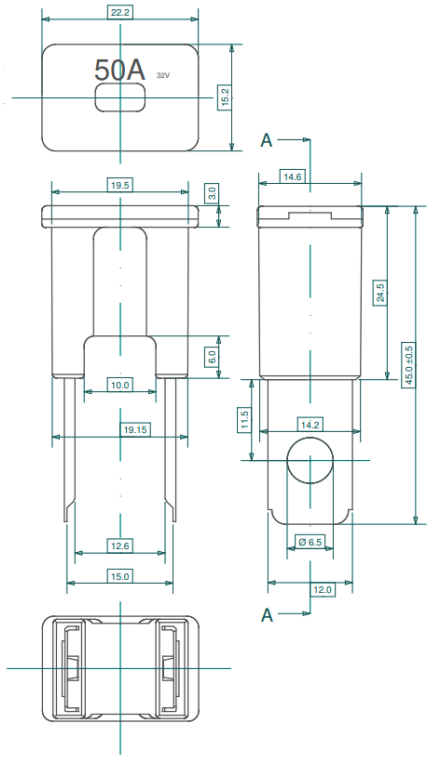

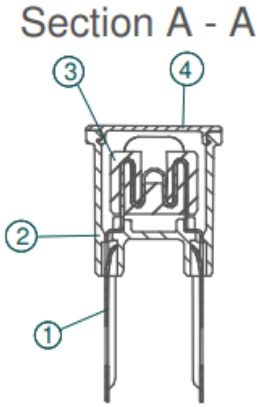

1 - element
2 - housing
3 - heat insulator
4 - top cover

DIMENSIONS

L x W x H: 22,2 x 15,2 x 24,5 (+20,5) mm

RATING TABLE

Part nr.	Color	Rating (A)	Rating (V)
CBF030B	pink	30	32
CBF040B	green	40	32
CBF050B	red	50	32
CBF060B	yellow	60	32
CBF070B	brown	70	32
CBF080B	black	80	32
CBF100B	blue	100	32
CBF120B	white	120	32
CBF140B	dark red	140	32

TECHNICAL SPECIFICATIONS

Body:	PA66 (30-60A), color coded PPS (70-140A), color coded
Cover:	PAR, clear
Blades:	Cu alloy
	Ceramic heat insulator