

evOTO EV FUSE - EV27-M4 SERIES

PART NR.
See rating table


COUNTRY OF ORIGIN
Japan

STANDARDS
REACH and RoHS compliant
ISO 8820-8

CHARACTERISTICS

- Meets international specs, complies to ISO 8820-8 and other standards
- Ceramic tube, laser marked, silica sand filled
- Rigid Ni-plated copper connections
- M4 connection holes, spaced 45 mm
- Maximum torque 2.1 Nm \pm 0.2 Nm
- Breaking capacity: 2.000 A at 450 Vdc

PHOTO / TECHNICAL DRAWING

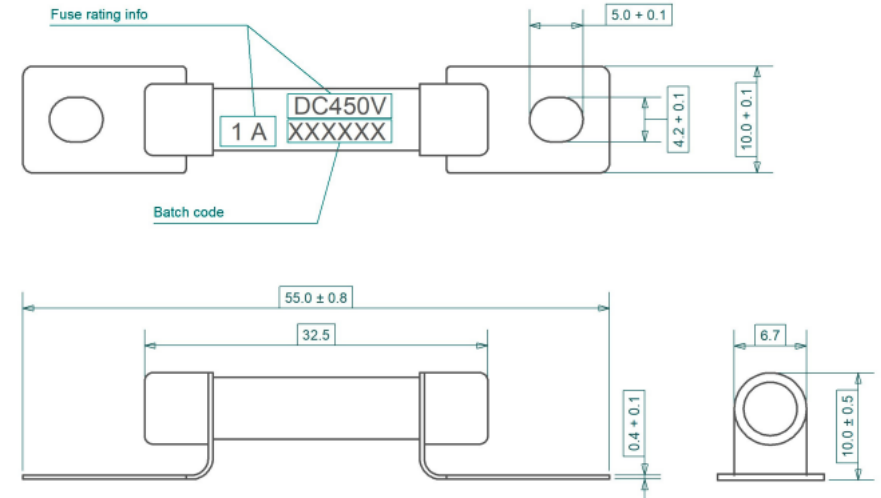

DIMENSIONS

L x Ø x H: 32,5 (+22,5) x 6,7 (+3,3) x 10 mm

RATING TABLE

Part nr.	Rating (A)	Rating (V)	Holes
EV27-001-M4	1	450	M4
EV27-005-M4	5	450	M4

TECHNICAL SPECIFICATIONS

Body:	Ceramic tube, silica sand filled
Element:	Silver
Connections:	Copper, nickel plated
Hole size:	M4, spaced 45 mm
Operating temp.:	-40 ~ 100 °C
Operating humidity:	Max. 95%
Max. torque:	2,1 \pm 0,2 Nm
Breaking capacity:	2000A@450Vdc