


PART NR.
See rating table

COUNTRY OF ORIGIN
Japan

STANDARDS
REACH and RoHS compliant
ISO 8820-8

- CHARACTERISTICS**
- Meets international specs, complies to ISO 8820-8 and other standards
 - UP tube, closed with epoxy resin laser marked, silica sand filled
 - Rigid Sn-plated copper connections
 - M8 connection holes, spaced 74,8mm
 - Maximum torque 12Nm ± 1Nm
 - Breaking capacity: 30.000 A at 500 Vdc

PHOTO / TECHNICAL DRAWING

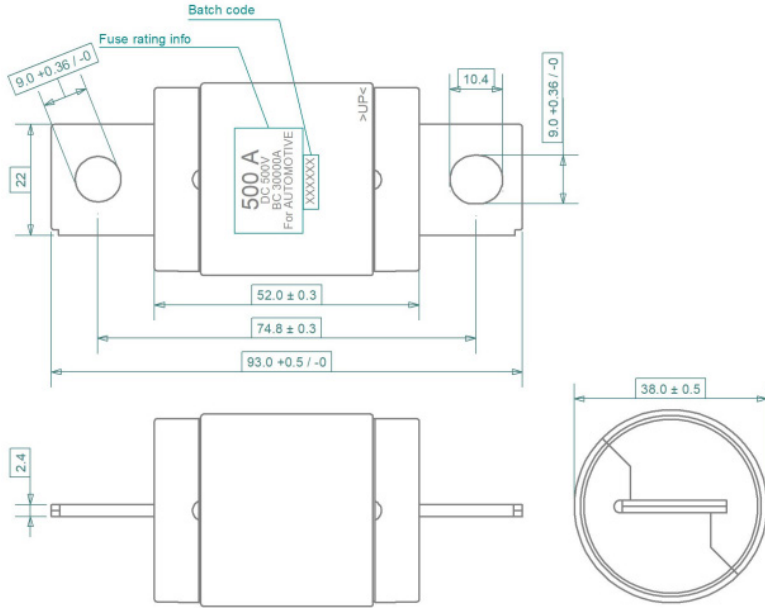

DIMENSIONS

L x Ø: 52 (+41) x 38 mm

RATING TABLE

Part nr.	Rating (A)	Rating (V)	Holes
EV29-350-M8	350	500	M8
EV29-400-M8	400	500	M8
EV29-450-M8	450	500	M8
EV29-500-M8	500	500	M8

TECHNICAL SPECIFICATIONS

- Body: Unsaturated polyester (UP) tube, silica sand filled, closed with epoxy resin
- Element: Copper
- Connections: Copper, tin plated
- Hole size: M8, spaced 74,8 mm
- Operating temp.: -40 ~ 85 °C
- Max. torque: 12 ± 1 Nm
- Breaking capacity: 30000A@500Vdc