

WORMDRIVE HOSE CLAMP - G SERIES W4/A2

PART NR.

See dimensions table

COUNTRY OF ORIGIN

Netherlands


STANDARDS

REACH and RoHS compliant
SS 2998, DIN3017-1

CHARACTERISTICS

- This clamp complies with standard SS 2298. It is only produced in stainless steel 300 series. This clamp is equipped with a stamped band with rolled-up edges, which allow perfect clamping on the hose without damaging it. This clamp will withstand high torsional levels and does not deform under the axial and radial forces that occur during clamping. The hexagonal head C7 allows standard tools to be used for mounting and removal
- For agricultural applications, automotive industry and aftermarket, industrial sector hardware, marine, oil, gas and food sectors and applications where higher corrosion resistance is required

PHOTO / TECHNICAL DRAWING

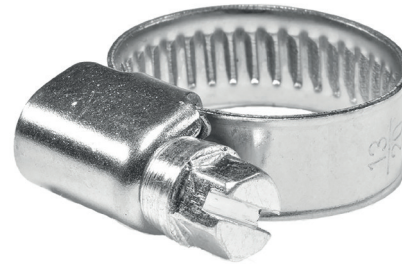

DIMENSIONS

TECHNICAL SPECIFICATIONS

Material:
Fastening:

Stainless steel, 300 series
7 mm hex head

Part nr.	Adjustment mm	Max. advised torque Nm	Band width mm	Band thickness mm	Packed
BHC4-814	8 - 14	3,0	9,0	0,5 - 1	50
BHC4-1117	11 - 17	3,0	9,0	0,5 - 1	50
BHC4-1320	13 - 20	3,0	9,0	0,5 - 1	50
BHC4-1525	15 - 25	5,0	12,0	0,5 - 1	50
BHC4-1929	19 - 29	5,0	12,0	0,5 - 1	50
BHC4-2232	22 - 32	5,0	12,0	0,5 - 1	50
BHC4-2638	26 - 38	5,0	12,0	0,5 - 1	50
BHC4-3244	32 - 44	5,0	12,0	0,5 - 1	50
BHC4-3850	38 - 50	5,0	12,0	0,5 - 1	50
BHC4-4456	44 - 56	5,0	12,0	0,5 - 1	50
BHC4-5065	50 - 65	5,0	12,0	0,5 - 1	50
BHC4-5875	58 - 75	5,0	12,0	0,5 - 1	10
BHC4-6885	68 - 85	5,0	12,0	0,5 - 1	10
BHC4-7795	77 - 95	5,0	12,0	0,5 - 1	10
BHC4-87112	87 - 112	5,0	12,0	0,5 - 1	10
BHC4-104138	104 - 138	5,0	12,0	0,5 - 1	10
BHC4-130165	130 - 165	5,0	12,0	0,5 - 1	10
BHC4-155180	155 - 180	5,0	12,0	0,5 - 1	10
BHC4-175205	175 - 205	5,0	12,0	0,5 - 1	10
BHC4-200231	200 - 231	5,0	12,0	0,5 - 1	10
BHC4-226256	226 - 256	5,0	12,0	0,5 - 1	10
BHC4-251282	251 - 282	5,0	12,0	0,5 - 1	10
BHC4-277307	277 - 307	5,0	12,0	0,5 - 1	10
BHC4-302325	302 - 325	5,0	12,0	0,5 - 1	10
BHC4-321350	321 - 350	5,0	12,0	0,5 - 1	10
BHC4-346375	346 - 375	5,0	12,0	0,5 - 1	10
BHC4-396425	396 - 425	5,0	12,0	0,5 - 1	10
BHC4-421450	421 - 450	5,0	12,0	0,5 - 1	10