


NYLON FEMALE DISCONNECTOR FULLY INSULATED - EASY ENTRY

PART NR.
See dimensions table

COUNTRY OF ORIGIN:
China

STANDARDS:
REACH and RoHS compliant
Halogen free

PHOTO / TECHNICAL DRAWING

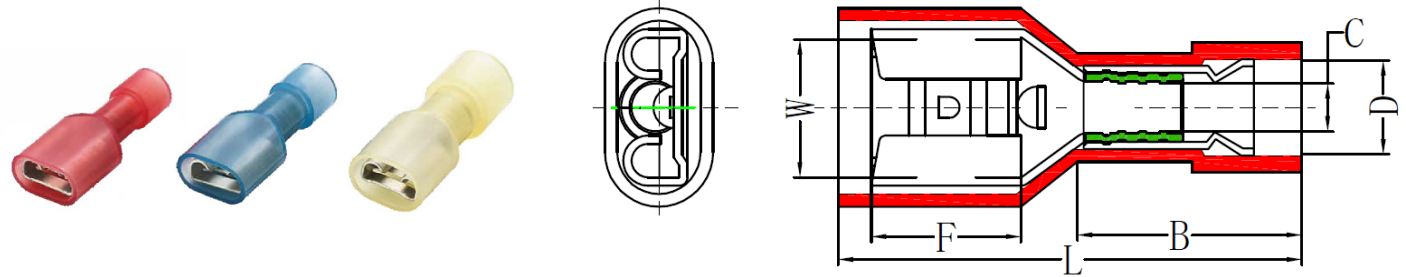

DIMENSIONS

Wire range	Part nr.	tab	W	F	L	B	D	C	UL
22~16 AWG 0,5~1,5 mm ²	ELNDDF 1.25-250A	6,3x0,8	6,6	7,2	21,2	11,0	4,0	1,7	
16~14 AWG 1,5~2,5 mm ²	ELNDDF 2-250A	6,3x0,8	6,6	7,2	21,5	11,0	5,0	2,3	
12~10 AWG 4~6 mm ²	ELNDDF 5.5-250A	6,3x0,8	6,6	7,2	24,2	13,0	6,5	3,4	

TECHNICAL SPECIFICATIONS

Terminal:	Brass, tin plated
Insulation:	Nylon (PA 66)
Operating temperature:	-40~105 °C
Max. electrical current:	300V
Max. electrical rating:	red 10A blue 15A yellow 24A