

NYLON FEMALE DISCONNECTOR - STANDARD

PART NR.

See dimensions table

COUNTRY OF ORIGIN:

Taiwan


STANDARDS:

REACH and RoHS compliant

Halogen free

UL listed

PHOTO / TECHNICAL DRAWING

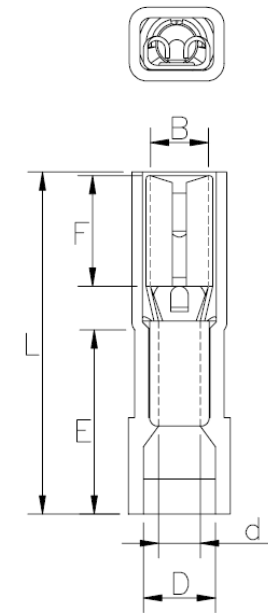

DIMENSIONS

| Wire range | Part nr. | tab | B | F | L | E | D | d1 | UL |
|-------------------------|------------------|---------|-----|-----|------|------|-----|-----|----|
| 22~16 AWG | ELNDF 1.25-110A5 | 2,8x0,5 | 3,2 | 6,4 | 19,5 | 10,5 | 4,2 | 1,7 | ✓ |
| 0,5~1,5 mm ² | ELNDF 1.25-110A8 | 2,8x0,8 | 3,2 | 6,4 | 19,5 | 10,5 | 4,2 | 1,7 | ✓ |

TECHNICAL SPECIFICATIONS

| | |
|--------------------------|-------------------|
| Terminal: | Brass, tin plated |
| Insulation: | Nylon (PA 66) |
| Operating temperature: | -40~105 °C |
| Max. electrical current: | 300V |
| Max. electrical rating: | red 10A |