



NYLON FEMALE BULLET DISCONNECTOR - EASY ENTRY

PART NR.
See dimensions table

COUNTRY OF ORIGIN:
China

STANDARDS:
REACH and RoHS compliant
Halogen free

PHOTO / TECHNICAL DRAWING

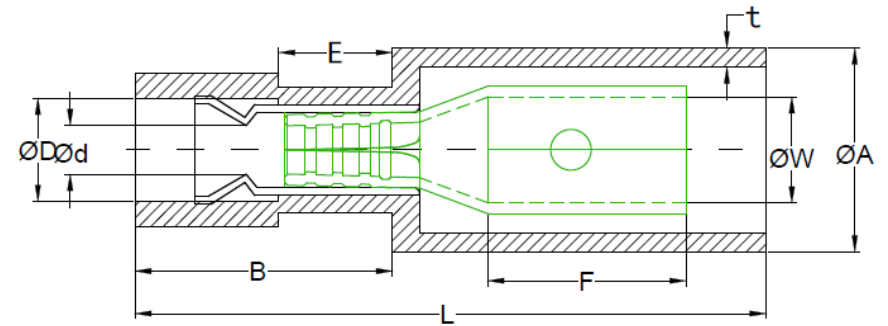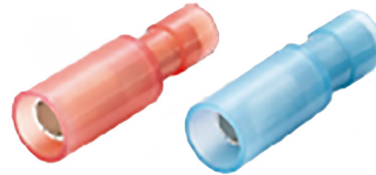

DIMENSIONS

Wire range	Part nr.	ØW	F	L	B	E	ØA	ØD	Ød	t	UL
22~16 AWG 0,5~1,5 mm ²	ECNDGF 1.25-5	3,9	7,3	23,3	9,6	4,7	7,5	3,8	1,7	0,7	
16~14 AWG 1,5~2,5 mm ²	ECNDGF 2-5	3,9	7,3	23,3	9,6	4,7	7,5	4,7	2,3	0,7	

TECHNICAL SPECIFICATIONS

Terminal:	Brass, tin plated
Insulation:	Nylon (PA 66)
Operating temperature:	-40~105 °C
Max. electrical current:	300V
Max. electrical rating:	red 10A blue 15A