

# NYLON FEMALE BULLET DISCONNECTOR - EASY ENTRY


**PART NR.**  
See dimensions table

**COUNTRY OF ORIGIN:**  
Taiwan

**STANDARDS:**  
REACH and RoHS compliant  
Halogen free

UL listed

## PHOTO / TECHNICAL DRAWING

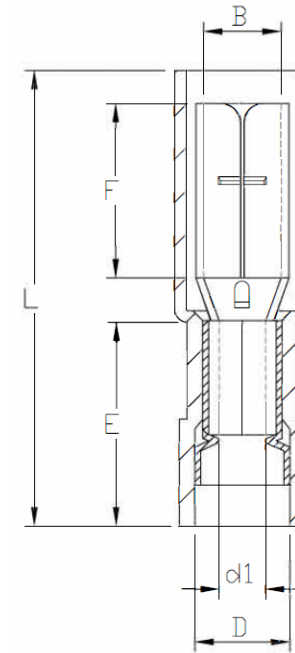

## DIMENSIONS

Wire range	Part nr.	B	F	L	E	D	d1	T	UL
22-16 AWG 0,5-1,5 mm <sup>2</sup>	ECNDGF 2-7	5,0	9,0	23,0	10,5	4,9	2,3	0,4	✓
12-10 AWG 4-6 mm <sup>2</sup>	ECNDGF 5.5-7	5,0	9,0	25,2	13,0	6,5	3,4	0,4	✓

## TECHNICAL SPECIFICATIONS

Terminal:	Brass, tin plated
Insulation:	Nylon (PA 66)
Operating temperature:	-40~105 °C
Max. electrical current:	300V
Max. electrical rating:	blue 15A yellow 24A