



**NYLON FEMALE BULLET DISCONNECTOR - STANDARD**

**PART NR.**  
See dimensions table

**COUNTRY OF ORIGIN:**  
Taiwan

**STANDARDS:**  
REACH and RoHS compliant  
Halogen free

**PHOTO / TECHNICAL DRAWING**

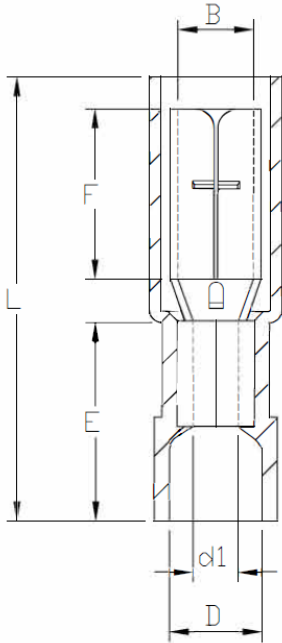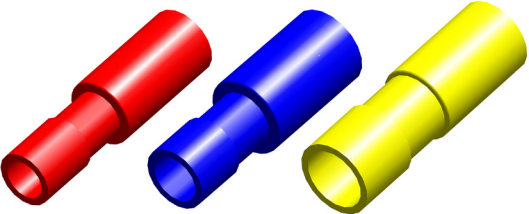

**DIMENSIONS**

Wire range	Part nr.	B	F	L	E	D	d1	t	UL
22~16 AWG 0,5~1,5 mm <sup>2</sup>	ECNGF 1.25-5	4,0	9,0	25,2	11,0	4,2	1,7	0,4	
16~14 AWG 1,5~2,5 mm <sup>2</sup>	ECNGF 2-5 ECNGF 2-7	4,0 5,0	9,0	25,2 23,0	11,0 10,5	4,9	2,3	0,4	
12~10 AWG 4~6 mm <sup>2</sup>	ECNGF 5.5-7	5,0	9,0	25,5	13,0	6,5	3,4	0,4	

**TECHNICAL SPECIFICATIONS**

Terminal: Brass, tin plated  
 Insulation: Nylon (PA 66)  
 Operating temperature: -40~105 °C  
 Max. electrical current: 300V  
 Max. electrical rating: red 10A  
 blue 15A  
 yellow 24A