

**PART NR.**

See dimensions table

**COUNTRY OF ORIGIN:**

Taiwan


**STANDARDS:**

REACH and RoHS compliant

Halogen free

**NYLON FEMALE FLAG DISCONNECTOR FULLY INSULATED - STANDARD**

**PHOTO / TECHNICAL DRAWING**

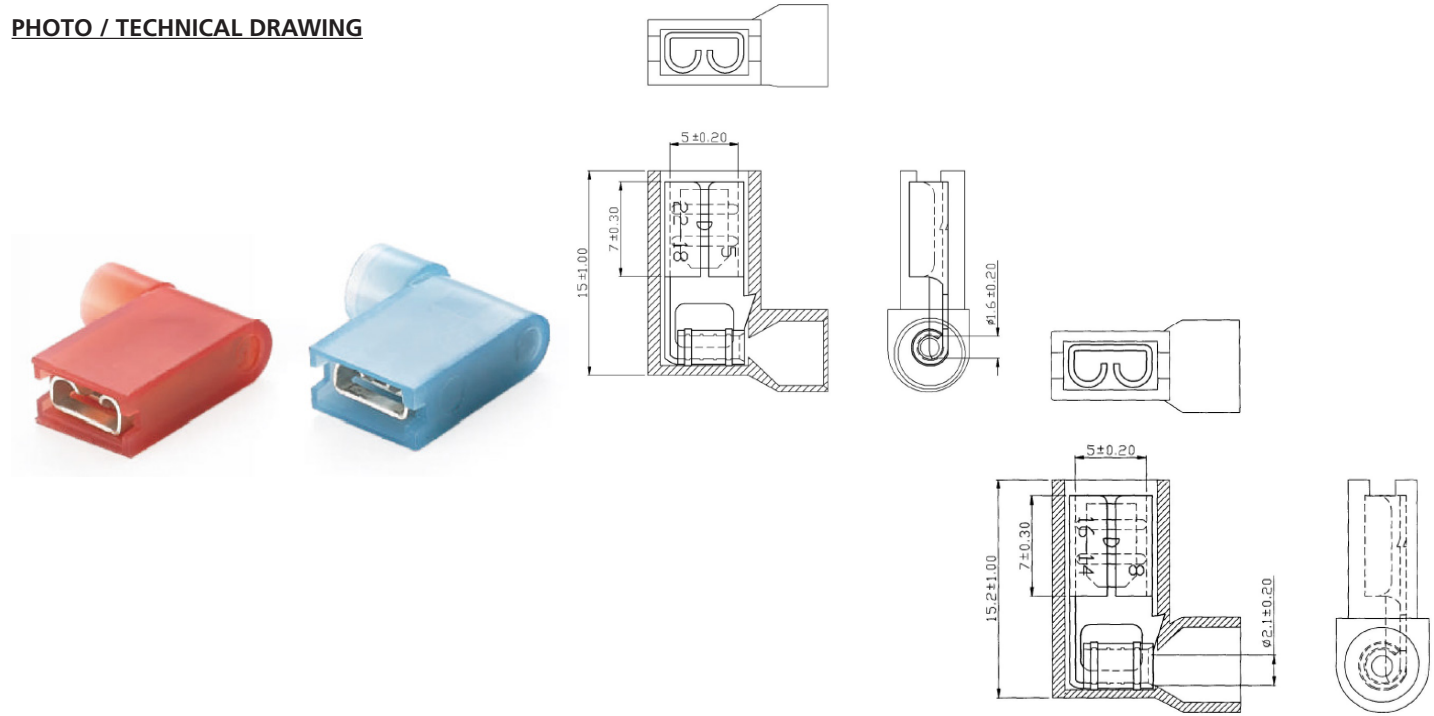

**DIMENSIONS**

Wire range	Part nr.	tab	B	F	L	d1	UL
22~16 AWG	ELNDFF 1.25-187A5	4,8x0,5	5,0	7,0	15,0	1,6	
0,5~1,5 mm <sup>2</sup>	ELNDFF 1.25-187A8	4,8x0,8	5,0	7,0	15,0	1,6	
16~14 AWG	ELNDFF 2-187A8	4,8x0,8	5,0	7,0	15,2	2,1	
1,5~2,5 mm <sup>2</sup>							

**TECHNICAL SPECIFICATIONS**

Terminal:	Brass, tin plated
Insulation:	Nylon (PA 66)
Operating temperature:	-40~105 °C
Max. electrical current:	300V
Max. electrical rating:	red 10A blue 15A