

PART NR.

See dimensions table

COUNTRY OF ORIGIN:

China


STANDARDS:

REACH and RoHS compliant

Halogen free

NYLON FEMALE FLAG DISCONNECTOR FULLY INSULATED - STANDARD

PHOTO / TECHNICAL DRAWING

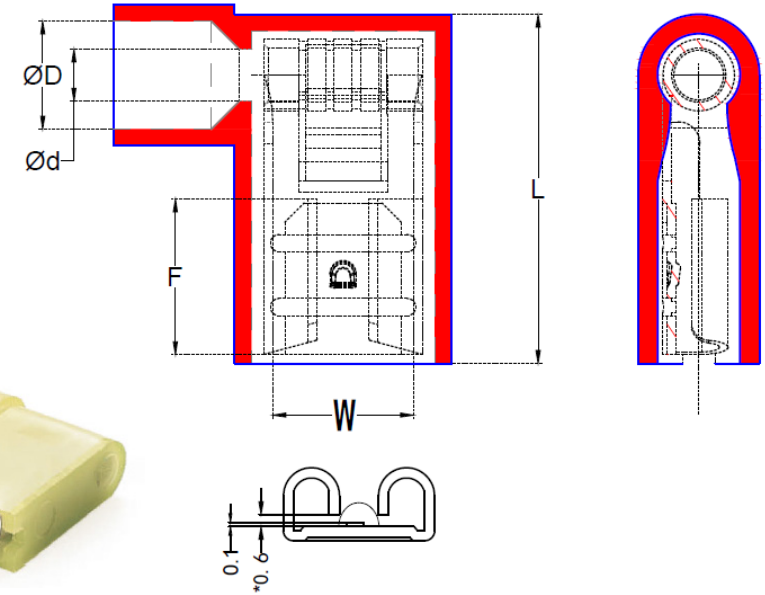

DIMENSIONS

Wire range	Part nr.	tab	W	F	L	$\varnothing D$	$\varnothing d$	UL
22~16 AWG 0,5~1,5 mm ²	ELNDF 1.25-250A	6,3x0,8	6,6	7,2	16,0	4,4	1,7	
16~14 AWG 1,5~2,5 mm ²	ELNDF 2-250A	6,3x0,8	6,6	7,2	16,0	5,0	2,3	
12~10 AWG 4~6 mm ²	ELNDF 5.5-250A	6,3x0,8	6,6	7,6	16,5	6,5	3,4	

TECHNICAL SPECIFICATIONS

Terminal:	Brass, tin plated
Insulation:	Nylon (PA 66)
Operating temperature:	-40~105 °C
Max. electrical current:	300V
Max. electrical rating:	red 10A blue 15A