



# NYLON MALE AND FEMALE DISCONNECTOR FULLY INSULATED - STANDARD

**PART NR.**  
See dimensions table

**COUNTRY OF ORIGIN:**  
China

**STANDARDS:**  
REACH and RoHS compliant  
Halogen free

**PHOTO / TECHNICAL DRAWING**

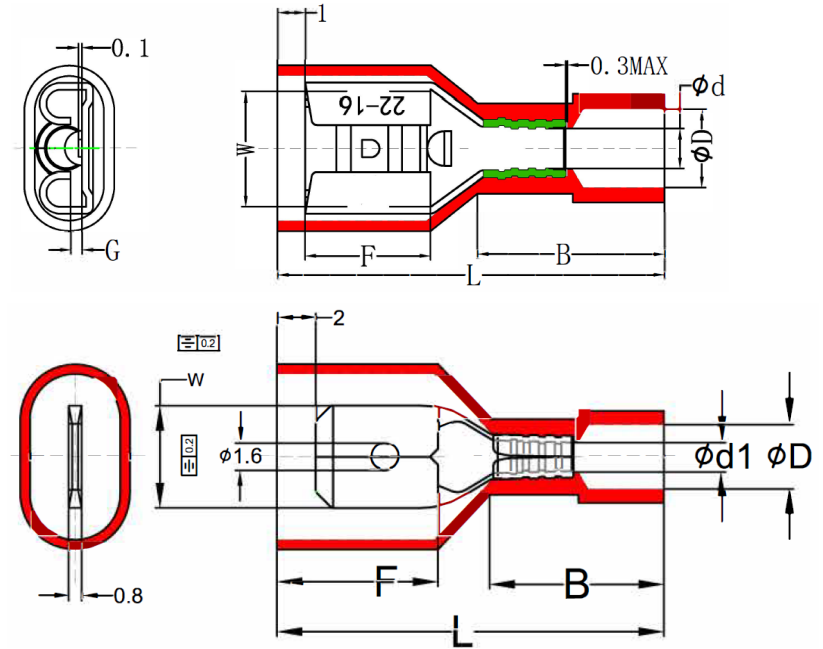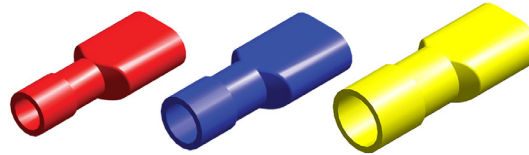

**DIMENSIONS**

Wire range	Part nr.	tab	W	F	L	B	ØD	Ød	UL
22~16 AWG 0,5~1,5 mm <sup>2</sup>	ELNDF 1.25-250A	6,3x0,8	6,6	7,2	21,6	10,3	4,0	1,7	
16~14 AWG 1,5~2,5 mm <sup>2</sup>	ELNDF 2-250A	6,3x0,8	6,6	7,2	21,6	10,6	4,5	2,3	
12~10 AWG 4~6 mm <sup>2</sup>	ELNDF 5.5-250A	6,3x0,8	6,6	7,2	22,3	12,1	6,3	3,4	
22~16 AWG 0,5~1,5 mm <sup>2</sup>	ELNDM 1.25-250	6,3x0,8	6,3	7,6	23,5	10,5	4,0	1,7	
16~14 AWG 1,5~2,5 mm <sup>2</sup>	ELNDM 2-250	6,3x0,8	6,3	7,6	23,5	10,5	4,5	2,3	
12~10 AWG 4~6 mm <sup>2</sup>	ELNDM 5.5-250	6,3x0,8	6,3	7,6	26,0	12,8	6,5	3,4	

**TECHNICAL SPECIFICATIONS**

Terminal:	Brass, tin plated
Insulation:	Nylon (PA 66)
Operating temperature:	-40~105 °C
Max. electrical current:	300V
Max. electrical rating:	red 10A blue 15A yellow 24A