


# NYLON MALE BULLET DISCONNECTOR FULLY INSULATED - EASY ENTRY

**PART NR.**  
See dimensions table

**COUNTRY OF ORIGIN:**  
China

**STANDARDS:**  
REACH and RoHS compliant  
Halogen free

## PHOTO / TECHNICAL DRAWING

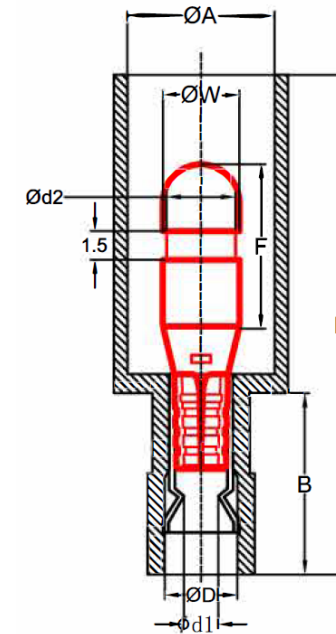

## DIMENSIONS

Wire range	Part nr.	ØW	F	L	B	ØA	Ød2	ØD	Ød1	UL
22~16 AWG 0,5~1,5 mm <sup>2</sup>	ELNDGM 1.25-5	4,0	9,0	26,2	10,7	7,7	3,8	3,8	1,7	
16~14 AWG 1,5~2,5 mm <sup>2</sup>	ELNDGM 2-5	4,0	9,0	26,2	10,7	7,7	3,8	4,7	2,3	

## TECHNICAL SPECIFICATIONS

Terminal:	Brass, tin plated
Insulation:	Nylon (PA 66)
Operating temperature:	-40~105 °C
Max. electrical current:	300V
Max. electrical rating:	red 10A blue 15A