

NYLON MALE BULLET DISCONNECTOR FULLY INSULATED - EASY ENTRY

PART NR.

See dimensions table

COUNTRY OF ORIGIN:

Taiwan


STANDARDS:

REACH and RoHS compliant

Halogen free

UL listed

PHOTO / TECHNICAL DRAWING

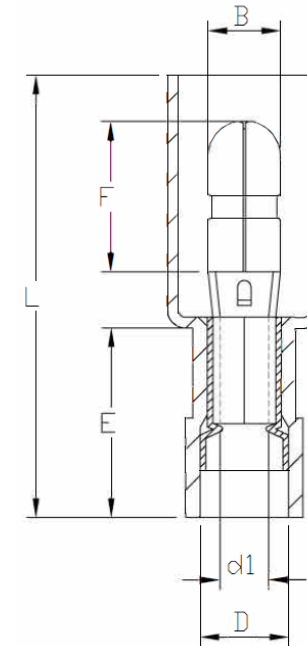

DIMENSIONS

Wire range	Part nr.	B	F	L	E	D	d1	t	UL
22~16 AWG 1,5~2,5 mm ²	ELNDGM 2-7	5,0	10,0	23,5	10,5	4,9	2,3	0,4	✓
12~10 AWG 4~6 mm ²	ELNDGM 5.5-7	5,0	10,0	26,0	13,0	6,5	3,4	0,4	✓

TECHNICAL SPECIFICATIONS

Terminal:	Brass, tin plated
Insulation:	Nylon (PA 66)
Operating temperature:	-40~105 °C
Max. electrical current:	300V
Max. electrical rating:	blue 15A yellow 24A