

NYLON FULLY INSULATED MALE BULLET DISCONNECTOR - STANDARD

PART NR.

See dimensions table

COUNTRY OF ORIGIN:



Taiwan

STANDARDS:

REACH and RoHS compliant

Halogen free

PHOTO / TECHNICAL DRAWING

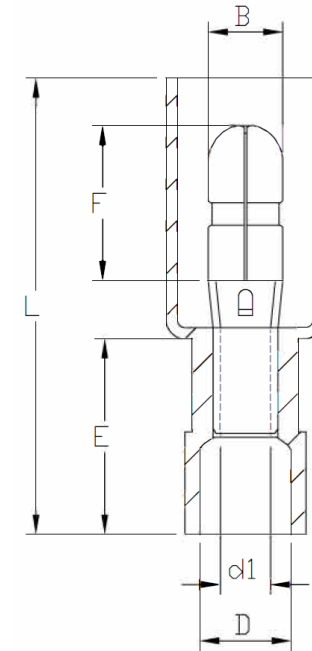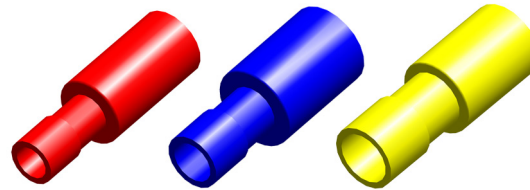

DIMENSIONS

Wire range	Part nr.	B	F	L	E	D	d1	UL
22~16 AWG 0,5~1,5 mm ²	ELNGM 1.25-5	4,0	10,5	26,5	10,0	4,2	1,7	
16~14 AWG 1,5~2,5 mm ²	ELNGM 2-5	4,0	10,5	26,5	10,0	4,9	2,3	
12~10 AWG 4~6 mm ²	ELNGM 5.5-7	5,0	10,0	23,5	10,5	4,9	2,3	
		5,0	10,0	26,0	13,0	6,5	3,4	

TECHNICAL SPECIFICATIONS

Terminal:	Brass, tin plated
Insulation:	Nylon (PA 66)
Operating temperature:	-40~105 °C
Max. electrical current:	300V
Max. electrical rating:	red 10A blue 15A yellow 24A