

NYLON MALE BULLET DISCONNECTOR - EASY ENTRY


PART NR.
See dimensions table

COUNTRY OF ORIGIN:
China

STANDARDS:
REACH and RoHS compliant
Halogen free

UL listed

PHOTO / TECHNICAL DRAWING

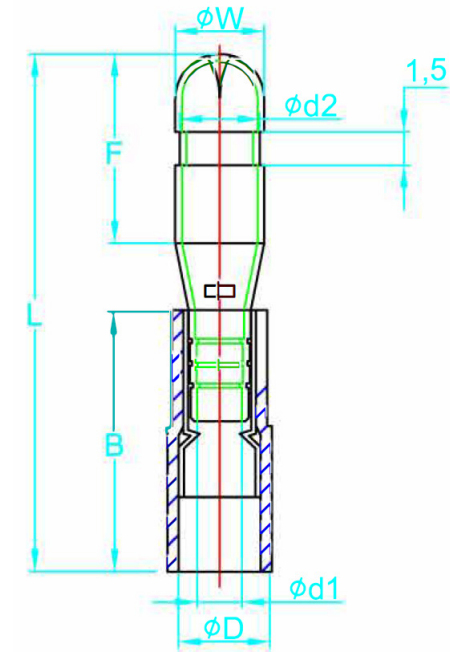

DIMENSIONS

Wire range	Part nr.	ØW	F	L	B	ØD	Ød1	Ød2	UL
22~16 AWG 0,5~1,5 mm ²	EFNDGM 1.25-5	4,0	9,0	21,7	10,7	3,8	1,7	3,7	✓
16~14 AWG 1,5~2,5 mm ²	EFNDGM 2-5	4,0	9,0	22,0	10,7	4,7	2,3	3,7	✓
12~10 AWG 4~6 mm ²	EFNDGM 5.5-7	5,0	9,0	25,2	12,7	6,2	3,4	4,8	✓

TECHNICAL SPECIFICATIONS

Terminal:	Brass, tin plated
Insulation:	Nylon (PA 66)
Operating temperature:	-40~105 °C
Max. electrical current:	300V
Max. electrical rating:	red 10A blue 15A yellow 24A