

PART NR.

See dimensions table

COUNTRY OF ORIGIN:

China

STANDARDS:


REACH and RoHS compliant

Halogen free

UL listed

NYLON PIN TERMINAL - DINBS

PHOTO / TECHNICAL DRAWING

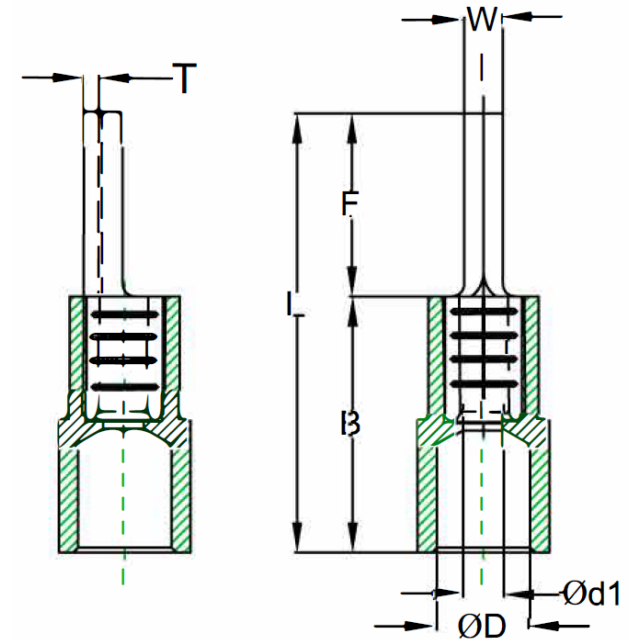

DIMENSIONS

Wire range	Part nr.	W	F	L	B	ØD	≤d1	T	UL
22~16 AWG	EFNPC 1.25-F10DINBS	1,9	10,0	20,7	10,7	3,9	1,7	0,75	✓
0,5~1,5 mm ²	EFNPC 1.25DINBS	1,9	12,0	22,7	10,7	3,9	1,7	0,75	✓
16~14 AWG	EFNPC 2-F9DINBS	1,9	9,0	19,7	10,7	4,5	2,3	0,8	✓
	EFNPC 2-F10DINBS	1,9	10,0	20,7	10,7	4,5	2,3	0,8	✓
	EFNPC 2DINBS	1,9	12,0	22,7	10,7	4,5	2,3	0,8	✓
1,5~2,5 mm ²	EFNPC 2-F13DINBS	1,9	13,0	23,7	10,7	4,5	2,3	0,8	✓
	EFNPC 5.5-F10DINBS	2,8	10,0	22,7	12,7	6,4	3,4	1,0	✓
	EFNPC 5.5DINBS	2,8	12,0	24,7	12,7	6,4	3,4	1,0	✓
4~6 mm ²	EFNPC 5.5-F13DINBS	2,8	14,0	26,7	12,7	6,4	3,4	1,0	✓

TECHNICAL SPECIFICATIONS

Terminal:	Copper, tin plated
Insulation:	Nylon (PA 66)
Operating temperature:	-40~105 °C
Max. electrical current:	600V
Max. electrical rating:	red 19A blue 27A yellow 48V