

NYLON RING TERMINAL - EASY ENTRY

PART NR.
See dimensions table

COUNTRY OF ORIGIN:
China



STANDARDS:
REACH and RoHS compliant
Halogen free

PHOTO / TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

| | |
|--------------------------|-----------------------------------|
| Terminal: | Copper, tin plated |
| Insulation: | Nylon (PA 66) |
| Operating temperature: | -40~105 °C |
| Max. electrical current: | 600V |
| Max. electrical rating: | red 19A blue 27A yellow 48A |

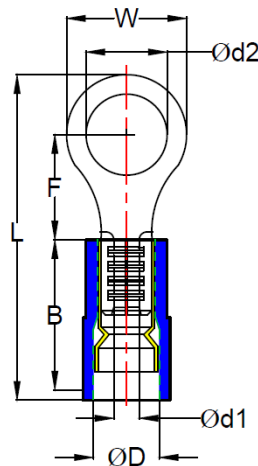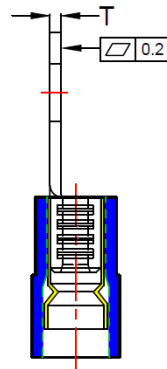

DIMENSIONS

| Wire range | Part nr. | Ød2 | W | F | L | B | ØD | Ød1 | T | UL |
|--------------------------------------|--------------|------|------|------|------|------|-----|-----|------|----|
| 22~16 AWG 0,5~1,5 mm ² | EFND 1.25-3 | 3,2 | 5,5 | 4,8 | 18,2 | 10,7 | 4,4 | 1,7 | 0,75 | |
| | EFND 1.25-M3 | 3,7 | 6,6 | 6,3 | 20,1 | 10,7 | 4,4 | 1,7 | 0,75 | |
| | EFND 1.25-4 | 4,3 | 6,6 | 6,3 | 20,1 | 10,7 | 4,4 | 1,7 | 0,75 | |
| | EFND 1.25-5 | 5,3 | 8,0 | 7,0 | 21,5 | 10,7 | 4,4 | 1,7 | 0,75 | |
| | EFND 1.25-6 | 6,4 | 11,8 | 11,0 | 27,4 | 10,7 | 4,4 | 1,7 | 0,75 | |
| | EFND 1.25-8 | 8,4 | 11,8 | 11,0 | 27,4 | 10,7 | 4,4 | 1,7 | 0,75 | |
| 16~14 AWG 1,5~2,5 mm ² | EFND 1.25-10 | 10,5 | 13,6 | 13,9 | 31,2 | 10,7 | 4,4 | 1,7 | 0,75 | |
| | EFND 2-53.3 | 3,2 | 6,6 | 4,7 | 18,5 | 10,7 | 5,0 | 2,3 | 0,8 | |
| | EFND 2-53 | 3,7 | 6,6 | 6,3 | 20,2 | 10,7 | 5,0 | 2,3 | 0,8 | |
| | EFND 2-4 | 4,3 | 8,5 | 7,8 | 22,5 | 10,7 | 5,0 | 2,3 | 0,8 | |
| | EFND 2-5 | 5,3 | 9,6 | 7,3 | 22,7 | 10,7 | 5,0 | 2,3 | 0,8 | |
| | EFND 2-6 | 6,4 | 12,0 | 11,0 | 27,6 | 10,7 | 5,0 | 2,3 | 0,8 | |
| 12~10 AWG 4~6 mm ² | EFND 2-8 | 8,4 | 12,0 | 11,0 | 27,6 | 10,7 | 5,0 | 2,3 | 0,8 | |
| | EFND 2-10 | 10,5 | 13,6 | 13,6 | 31,2 | 10,7 | 5,0 | 2,3 | 0,8 | |
| | EFND 5.5-4 | 4,3 | 8,0 | 8,3 | 25,0 | 12,7 | 7,0 | 3,4 | 1,0 | |
| | EFND 5.5-5 | 5,3 | 9,5 | 8,3 | 26,0 | 13,0 | 7,0 | 3,4 | 1,0 | |
| | EFND 5.5-6 | 6,4 | 12,0 | 10,5 | 29,5 | 13,0 | 7,0 | 3,4 | 1,0 | |
| | EFND 5.5-8 | 8,4 | 15,0 | 13,5 | 34,0 | 13,0 | 7,0 | 3,4 | 1,0 | |
| | EFND 5.5-10 | 10,5 | 15,0 | 13,5 | 34,0 | 13,0 | 7,0 | 3,4 | 1,0 | |
| | EFND 5.5-12 | 13,0 | 19,2 | 16,0 | 38,6 | 13,0 | 7,0 | 3,4 | 1,0 | |