

NYLON SPADE TERMINAL - EASY ENTRY

PART NR.
See dimensions table

COUNTRY OF ORIGIN:
China



STANDARDS:
REACH and RoHS compliant
Halogen free

PHOTO / TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Terminal:	Copper, tin plated
Insulation:	Nylon (PA 66)
Operating temperature:	-40~105 °C
Max. electrical current:	600V
Max. electrical rating:	red 19A blue 27A yellow 48A

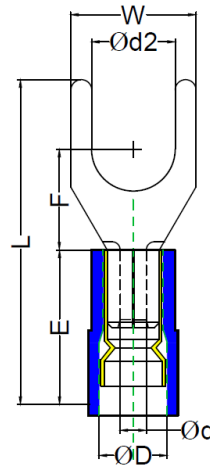

DIMENSIONS

Wire range	Part nr.	Ød2	W	F	L	E	ØD	Ød	T	UL
22~16 AWG 0,5~1,5 mm²	EFND 1.25-B3A	3,3	5,7	6,5	21,7	10,7	4,4	1,7	0,75	
	EFND 1.25-YS3A	3,8	6,4	6,5	21,7	10,7	4,4	1,7	0,75	
	EFND 1.25-YS4A	4,4	6,4	6,5	21,7	10,7	4,4	1,7	0,75	
	EFND 1.25-S4A	4,4	7,2	6,5	21,7	10,7	4,4	1,7	0,75	
	EFND 1.25-5A	5,4	9,5	6,5	21,7	10,7	4,4	1,7	0,75	
	EFND 1.25-6A	6,6	12,0	11,0	27,7	10,7	4,4	1,7	0,75	
16~14 AWG 1,5~2,5 mm²	EFND 2-YS3A	3,8	5,7	6,5	21,7	10,7	5,0	2,3	0,8	
	EFND 2-YS4A	4,4	6,4	6,5	21,7	10,7	5,0	2,3	0,8	
	EFND 2-5A	5,4	9,3	6,5	21,7	10,7	5,0	2,3	0,8	
	EFND 2-6A	6,6	12,0	11,0	27,7	10,7	5,0	2,3	0,8	
12~10 AWG 4~6 mm²	EFND 5.5-3A	3,8	8,3	7,0	25,2	12,7	7,0	3,4	1,0	
	EFND 5.5-S4A	4,4	8,3	7,0	25,2	12,7	7,0	3,4	1,0	
	EFND 5.5-5A	5,4	9,0	7,0	25,2	12,7	7,0	3,4	1,0	
	EFND 5.5-6A	6,6	12,0	12,0	31,2	12,7	7,0	3,4	1,0	
	EFND 5.5-8A	8,5	14,0	11,5	30,2	12,7	7,0	3,4	1,0	