

PART NR.

See dimensions table

COUNTRY OF ORIGIN:


China

STANDARDS:

REACH and RoHS compliant

PVC BUTT CONNECTOR - EASY ENTRY

PHOTO / TECHNICAL DRAWING

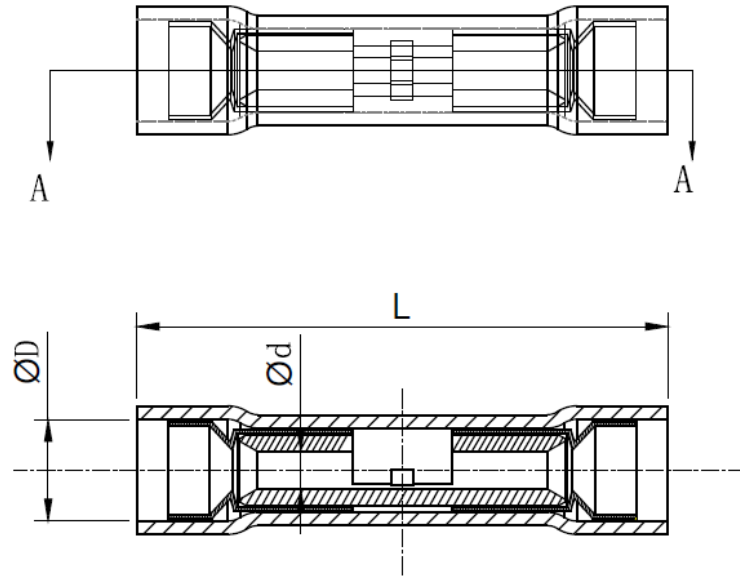

DIMENSIONS

Wire range	Part nr.	L	ØD	Ød	UL
22~16 AWG 0,5~1,5 mm ²	REFVDC 1.25	24,5	4,5	1,7	
16~14 AWG 1,5~2,5 mm ²	REFVDC 2	24,5	5,0	2,3	
12~10 AWG 4~6 mm ²	REFVDC 5.5	29,5	6,6	3,4	

TECHNICAL SPECIFICATIONS

Terminal:	Copper, tin plated
Insulation:	Vinyl (PVC)
Operating temperature:	-10~75 °C
Max. electrical current:	600V
Max. electrical rating:	red 19A blue 27A yellow 48A