

PVC BUTT CONNECTOR - STANDARD

PART NR.

See dimensions table


COUNTRY OF ORIGIN:

China

STANDARDS:

REACH and RoHS compliant

PHOTO / TECHNICAL DRAWING

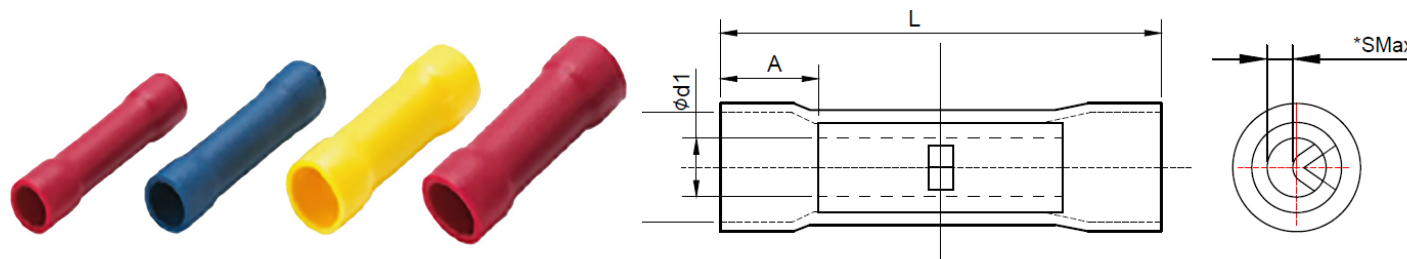

DIMENSIONS

Wire range	Part nr.	L	ØD	Ød1	SMax	A	UL
22~16 AWG 0,5~1,5 mm ²	RBFVC 1.25	26,0	4,3	1,9	0,8	5,5	
16~14 AWG 1,5~2,5 mm ²	RBFVC 2	26,0	4,8	2,5	1,5	5,5	
12~10 AWG 4~6 mm ²	RBFVC 5.5	27,0	6,3	3,6	2,5	6,0	
8 AWG 8 mm ²	RBFVC 8	35,5	8,5	4,5	3,5	7,2	

TECHNICAL SPECIFICATIONS

Terminal:	Copper, tin plated
Insulation:	Vinyl (PVC)
Operating temperature:	-10~75 °C
Max. electrical current:	600V
Max. electrical rating:	red 19A blue 27A yellow 48A red 70A