

PVC FEMALE DISCONNECTOR FULLY INSULATED - EASY ENTRY

PART NR.

See dimensions table

COUNTRY OF ORIGIN:




China

STANDARDS:

REACH and RoHS compliant

UL listed (tabs $\leq 6.3 \times 0.8$ only)

PHOTO / TECHNICAL DRAWING

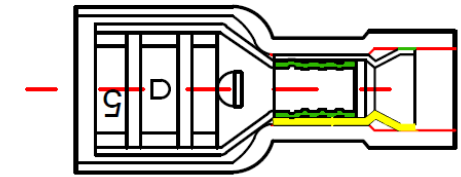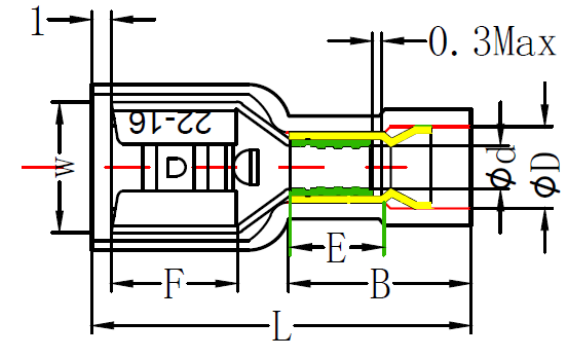

DIMENSIONS

Wire range	Part nr.	tab	W	F	L	B	E	ØD	Ød1	G	UL
22~16 AWG 0,5~1,5 mm ²	RELVDDF 1.25-110A5	2,8x0,5	3,1	6,5	19,0	10,5	5,5	3,9	1,7	0,4	✓
	RELVDDF 1.25-110A8	2,8x0,8	3,1	6,5	19,0	10,5	5,5	3,9	1,7	0,7	✓
	RELVDDF 1.25-187A5	4,8x0,5	5,0	6,4	20,5	10,5	5,5	3,9	1,7	0,5	✓
	RELVDDF 1.25-187A8	4,8x0,8	5,0	6,4	20,5	10,5	5,5	3,9	1,7	0,7	✓
16~14 AWG 1,5~2,5 mm ²	RELVDDF 2-110A5	2,8x0,5	3,1	6,5	19,0	10,5	5,5	4,7	2,3	0,4	✓
	RELVDDF 2-110A8	2,8x0,8	3,1	6,5	19,0	10,5	5,5	4,7	2,3	0,7	✓
	RELVDDF 2-187A5	4,8x0,5	5,0	6,4	20,5	10,5	5,5	4,7	2,3	0,4	✓
12~10 AWG 4~6 mm ²	RELVDDF 2-187A8	4,8x0,8	5,0	6,4	20,5	10,5	5,5	4,7	2,3	0,7	✓
	RELVDDF 5.5-250A	6,3x0,8	6,6	7,2	23,8	13,0	6,5	6,3	3,4	0,6	✓
	RELVDDF 5.5-375A	9,5x1,2	9,8	12,0	30,0	13,0	6,5	6,3	3,4	0,9	

TECHNICAL SPECIFICATIONS

Terminal:	Brass, tin plated
Insulation:	Vinyl (PVC)
Operating temperature:	-10~75 °C
Max. electrical current:	300V
Max. electrical rating:	red 10A blue 15A yellow 24A