

PART NR.

See dimensions table

COUNTRY OF ORIGIN:

China


STANDARDS:

REACH and RoHS compliant

UL listed (tabs $\leq 6.3 \times 0.8$ only)

PVC FEMALE DISCONNECTOR FULLY INSULATED - EASY ENTRY

PHOTO / TECHNICAL DRAWING

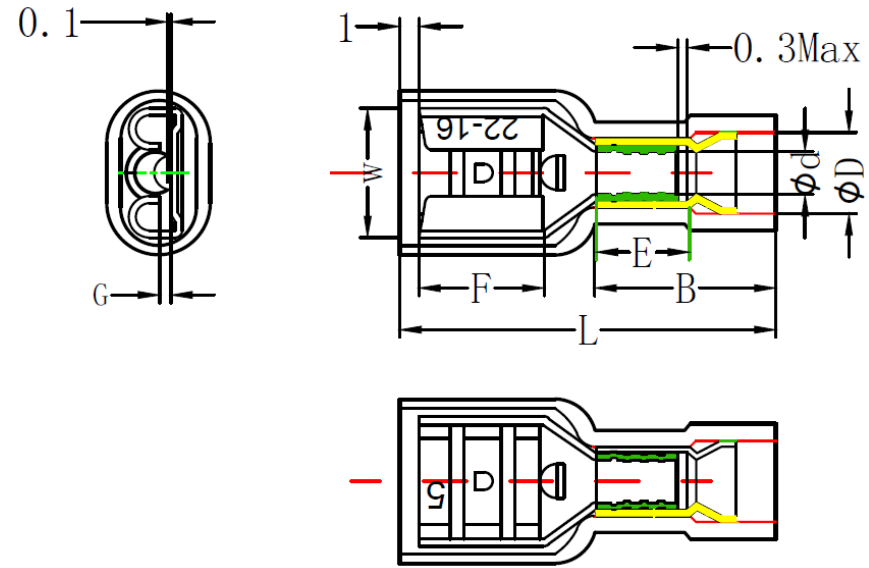

DIMENSIONS

Wire range	Part nr.	tab	W	F	L	B	E	ØD	Ød1	G	UL
22-16 AWG 0,5-1,5 mm ²	REOVDDF 1.25-250A	6,3x0,8	6,6	7,2	21,8	10,5	5,5	3,9	1,7	0,6	✓
16-14 AWG 1,5-2,5 mm ²	REOVDDF 2-250A	6,3x0,8	6,6	7,2	21,8	10,5	5,5	4,7	2,3	0,6	✓

TECHNICAL SPECIFICATIONS

Terminal:	Brass, tin plated
Insulation:	Vinyl (PVC)
Operating temperature:	-10~75 °C
Max. electrical current:	300V
Max. electrical rating:	red 10A blue 15A