

PVC FEMALE DISCONNECTOR FULLY INSULATED - STANDARD

PART NR.

See dimensions table



COUNTRY OF ORIGIN:

China

STANDARDS:

REACH and RoHS compliant

PHOTO / TECHNICAL DRAWING

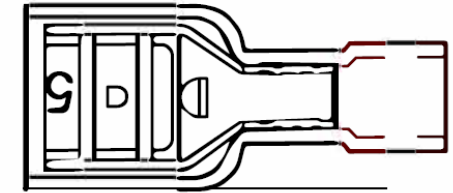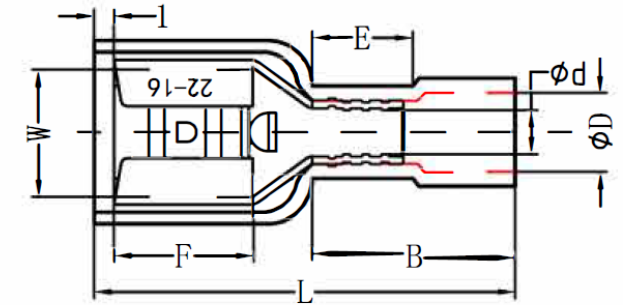

DIMENSIONS

Wire range	Part nr.	tab	W	F	L	B	E	ØD	Ød1	UL
22~16 AWG 0,5~1,5 mm ²	RBLVDF 1.25-110A5	2,8x0,5	3,2	6,5	19,0	10,5	5,5	3,5	1,7	
	RBLVDF 1.25-110A8	2,8x0,8	3,2	6,5	19,0	10,5	5,5	3,5	1,7	
	RBLVDF 1.25-187A5	4,8x0,5	5,0	6,4	19,0	10,5	5,5	3,5	1,7	
	RBLVDF 1.25-187A8	4,8x0,8	5,0	6,4	19,0	10,5	5,5	3,5	1,7	
16~14 AWG 1,5~2,5 mm ²	RBLVDF 2-110A5	2,8x0,5	3,2	6,5	19,0	10,5	5,5	4,3	2,3	
	RBLVDF 2-110A8	2,8x0,8	3,2	6,5	19,0	10,5	5,5	4,3	2,3	
	RBLVDF 2-187A5	4,8x0,5	5,0	6,4	21,8	10,5	5,5	4,3	2,3	
	RBLVDF 2-187A8	4,8x0,8	5,0	6,4	21,8	10,5	5,5	4,3	2,3	
12~10 AWG 4~6 mm ²	RBLVDF 5.5-250A	6,3x0,8	6,6	7,2	23,8	10,9	6,5	5,6	3,4	

TECHNICAL SPECIFICATIONS

Terminal:

Insulation:

Operating temperature:

Max. electrical current:

Max. electrical rating:

Brass, tin plated

Vinyl (PVC)

-10~75 °C

300V

red 10A

blue 15A

yellow 24A