

PVC FEMALE DISCONNECTOR FULLY INSULATED - STRAIGHT COPPER SLEEVE

PART NR.

See dimensions table


COUNTRY OF ORIGIN:

China

STANDARDS:

REACH and RoHS compliant

PHOTO / TECHNICAL DRAWING

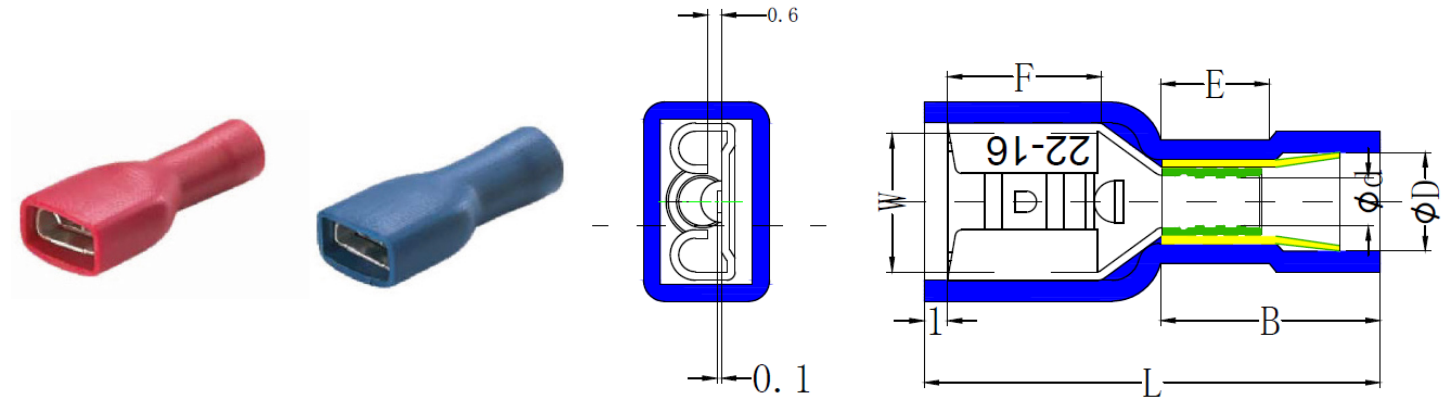

DIMENSIONS

Wire range	Part nr.	tab	W	F	L	B	E	ØD	Ød1	UL
22~16 AWG 0,5~1,5 mm ²	RBLVDDF 1.25-250A	6,3x0,8	6,6	7,2	21,8	10,5	5,5	3,9	1,7	
16~14 AWG 1,5~2,5 mm ²	RBLVDDF 2-250A	6,3x0,8	6,6	7,2	21,8	10,5	5,5	4,7	2,3	

TECHNICAL SPECIFICATIONS

Terminal:	Brass, tin plated
Insulation:	Vinyl (PVC)
Operating temperature:	-10~75 °C
Max. electrical current:	300V
Max. electrical rating:	red 10A blue 15A