

PVC DIN RING TERMINAL - EASY ENTRY

PART NR.
See dimensions table

COUNTRY OF ORIGIN:
China


STANDARDS:
REACH and RoHS compliant

PHOTO / TECHNICAL DRAWING



TECHNICAL SPECIFICATIONS

Terminal:	Copper, tin plated
Insulation:	Vinyl (PVC)
Operating temperature:	-10~75 °C
Max. electrical current:	600V
Max. electrical rating:	red 19A blue 27A yellow 48A

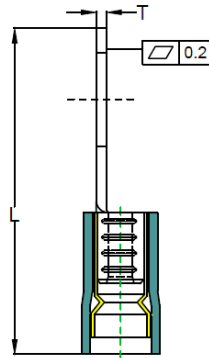

DIMENSIONS

Wire range	Part nr.	Ød2	W	F	L	B	ØD	Ød1	T	UL
22~16 AWG 0,5~1,5 mm ²	REFVD 1.25-3DIN	3,2	6,0	16,0	19,0	10,0	4,3	1,7	0,75	
	REFVD 1.25-M3DIN	3,7	6,0	16,0	19,0	10,0	4,3	1,7	0,75	
	REFVD 1.25-4DIN	4,3	8,0	17,0	21,0	10,0	4,3	1,7	0,75	
	REFVD 1.25-5DIN	5,3	10,0	18,0	23,0	10,0	4,3	1,7	0,75	
	REFVD 1.25-6DIN	6,5	11,0	20,0	25,5	10,0	4,3	1,7	0,75	
	REFVD 1.25-8DIN	8,4	14,0	22,0	29,0	10,0	4,3	1,7	0,75	
REFVD 1.25-10DIN	10,5	18,0	44,0	33,0	10,0	4,3	1,7	0,75		
16~14 AWG 1,5~2,5 mm ²	REFVD 2-S3.3DIN	3,2	6,0	16,0	19,0	10,0	5,0	2,3	0,8	
	REFVD 2-S3DIN	3,7	6,0	16,0	19,0	10,0	5,0	2,3	0,8	
	REFVD 2-4DIN	4,3	8,0	17,0	21,0	10,0	5,0	2,3	0,8	
	REFVD 2-5DIN	5,3	10,0	19,0	24,0	10,0	5,0	2,3	0,8	
	REFVD 2-6DIN	6,5	11,0	21,0	26,5	10,0	5,0	2,3	0,8	
	REFVD 2-8DIN	8,4	14,0	22,0	29,0	10,0	5,0	2,3	0,8	
REFVD 2-10DIN	10,5	18,0	23,5	32,5	10,0	5,0	2,3	0,8		
REFVD 2-12DIN	13,0	18,0	25,0	34,0	10,0	5,0	2,3	0,8		
12~10 AWG 4~6 mm ²	REFVD 5.5-4DIN	4,3	8,0	21,0	25,0	13,0	6,7	3,4	1,0	
	REFVD 5.5-5DIN	5,3	10,0	22,0	27,0	13,0	6,7	3,4	1,0	
	REFVD 5.5-6DIN	6,5	11,0	22,5	28,0	13,0	6,7	3,4	1,0	
	REFVD 5.5-8DIN	8,4	14,0	26,0	33,0	13,0	6,7	3,4	1,0	
	REFVD 5.5-10DIN	10,5	18,0	28,0	37,0	13,0	6,7	3,4	1,0	
REFVD 5.5-12DIN	13,0	18,0	28,0	37,0	13,0	6,7	3,4	1,0		

