

PART NR.

See dimensions table

COUNTRY OF ORIGIN:


China

STANDARDS:

REACH and RoHS compliant

PVC BLADE TERMINAL - EASY ENTRY

PHOTO / TECHNICAL DRAWING

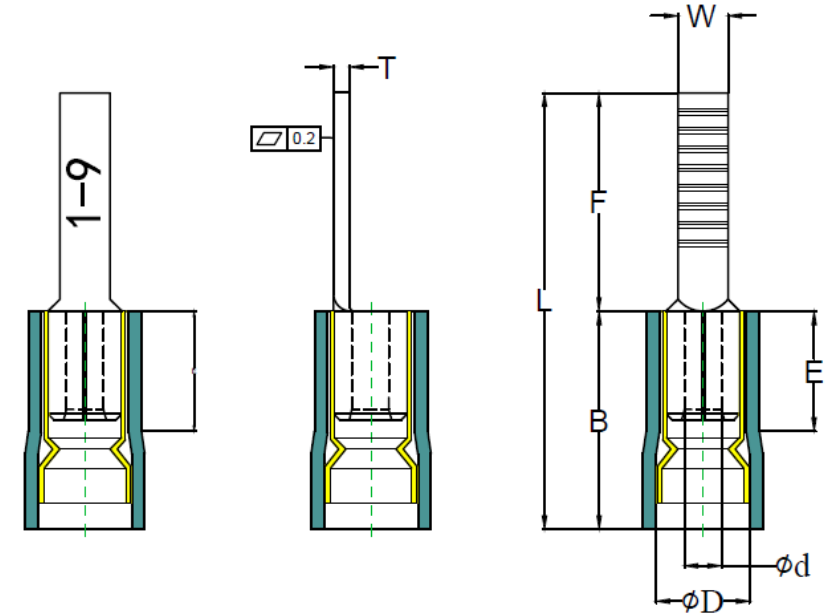

DIMENSIONS

Wire range	Part nr.	W	F	L	B	ØD	Ød1	T	UL
22~16 AWG 0,5~1,5 mm ²	REFVDPC 1.25-PF10	2,3	10,0	19,8	10,0	4,2	1,7	0,75	
	REFVDPC 1.25-PF11	3,0	11,0	20,8	10,0	4,2	1,7	0,75	
	REFVDPC 1.25-PF14	2,4	14,0	23,8	10,0	4,2	1,7	0,75	
	REFVDPC 1.25-P	2,2	18,0	27,8	10,0	4,2	1,7	0,75	
16~14 AWG 1,5~2,5 mm ²	REFVDPC 2-PF9	2,8	9,0	18,8	10,0	5,0	2,3	0,8	
	REFVDPC 2-PF10	2,3	10,0	19,8	10,0	5,0	2,3	0,8	
	REFVDPC 2-PF13	2,4	14,0	23,8	10,0	5,0	2,3	0,8	
12~10 AWG 4~6 mm ²	REFVDPC 2-P	2,2	18,0	27,8	10,0	5,0	2,3	0,8	
	REFVDPC 5.5-PF10	2,8	10,0	23,0	13,0	6,8	3,4	1,0	
	REFVDPC 5.5-P	4,5	18,0	31,0	13,0	6,8	3,4	1,0	

TECHNICAL SPECIFICATIONS

Terminal:

Insulation:

Operating temperature:

Max. electrical current:

Max. electrical rating:

Copper, tin plated

Vinyl (PVC)

-10~75 °C

600V

red 19A

blue 27A

yellow 48A