

PART NR.

See dimensions table

COUNTRY OF ORIGIN:

China


STANDARDS:

REACH and RoHS compliant

UL listed (blue and yellow only)

PVC BLADE TERMINAL - STANDARD

PHOTO / TECHNICAL DRAWING

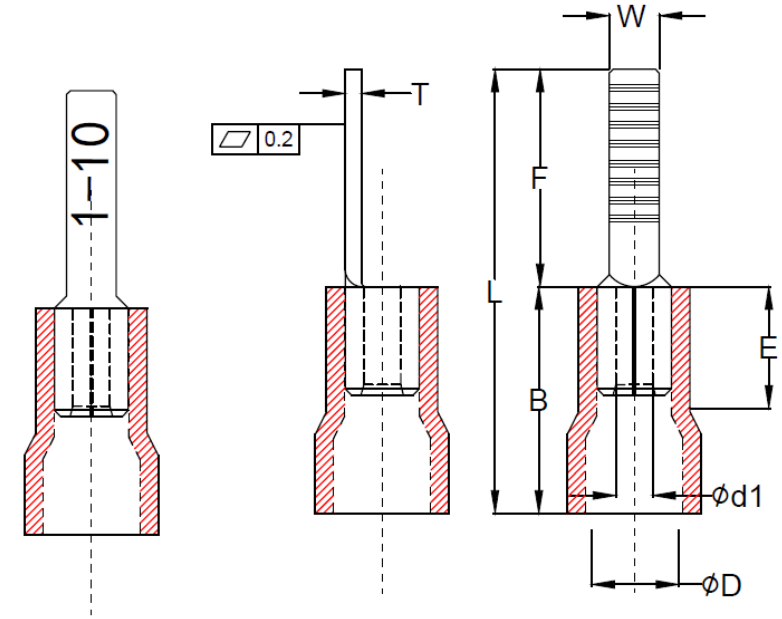

DIMENSIONS

Wire range	Part nr.	W	F	L	B	D	Ød1	T	UL
22~16 AWG 0,5~1,5 mm ²	RBFVPC 1.25-PF10	2,3	10,0	19,8	10,0	4,0	1,7	0,75	
	RBFVPC 1.25-PF11	3,0	11,0	20,8	10,0	4,0	1,7	0,75	
	RBFVPC 1.25-PF14	2,4	14,0	23,8	10,0	4,0	1,7	0,75	
	RBFVPC 1.25-P	2,2	18,0	27,8	10,0	4,0	1,7	0,75	
16~14 AWG 1,5~2,5 mm ²	RBFVPC 2-PF9	2,8	9,0	18,8	10,0	4,8	2,3	0,8	✓
	RBFVPC 2-PF10	2,3	10,0	19,8	10,0	4,8	2,3	0,8	✓
	RBFVPC 2-PF13	2,4	13,0	22,8	10,0	4,8	2,3	0,8	✓
12~10 AWG 4~6 mm ²	RBFVPC 2-P	2,2	18,0	27,8	10,0	4,8	2,3	0,8	✓
	RBFVPC 5.5-PF10	2,8	10,0	23,0	13,0	6,7	3,4	1,0	✓
	RBFVPC 5.5-P	4,5	18,0	31,0	13,0	6,7	3,4	1,0	✓

TECHNICAL SPECIFICATIONS

Terminal:	Copper, tin plated
Insulation:	Vinyl (PVC)
Operating temperature:	-10~75 °C
Max. electrical current:	600V
Max. electrical rating:	red 19A blue 27A yellow 48A