

**PART NR.**

See dimensions table

**COUNTRY OF ORIGIN:**



Mexico

**STANDARDS:**

Waterproof

**SOLDER BUTT CONNECTOR - DUO FLUX**

**PHOTO / TECHNICAL DRAWING**

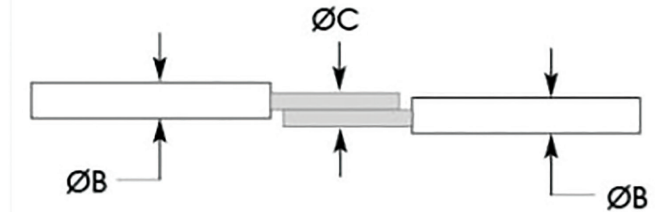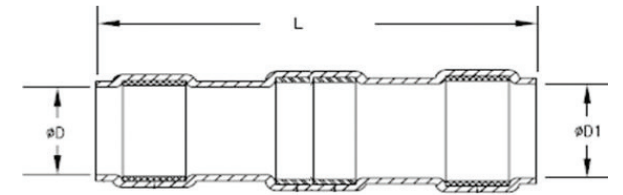

**DIMENSIONS**

Wire range	Part nr.	L	Ø A	Ø B min	Ø B max Ø C max	Ø C min	UL
21~17 AWG 0,4~1,0 mm <sup>2</sup>	DCWT-9002	31	2,3	1,5	2,3	1,8	
17~14 AWG 1,0~2,5 mm <sup>2</sup>	DCWT-9003	36	4,3	2,0	4,3	2,3	
12~10 AWG 3~5 mm <sup>2</sup>	DCWT-9004	42	6,8	3,4	6,8	3,7	

**TECHNICAL SPECIFICATIONS**

Insulation:

Polyolefin, heat shrinkable,  
radiation cross-linked modified

Solder preform:

Sn50 Pb32 Cd18

Flux:

Flux ROM1 per ANSI / J-STD-004

Operating temperature: -55~125 °C

Min. shrink temperature: 140 °C