

**OPEN BARREL BULLET DISCONNECTOR**


**PART NR.**  
 See dimensions table  
**05-00x-Mx-xA** male  
**06-00x-Mx-xA** female

**MS** on strip  
**ML** loose piece

**COUNTRY OF ORIGIN**  
 Taiwan

**STANDARDS**  
 REACH and RoHS compliant

**PHOTO / TECHNICAL DRAWING**

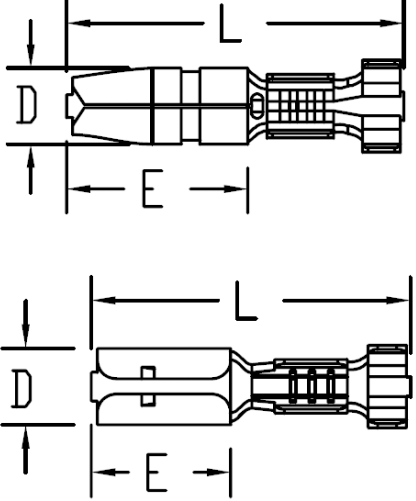

**DIMENSIONS**

Wire range	Part nr. natural	Part nr. tin plated	Bullet size	L	E	Pcs/roll MOQ	UL
1,5-2,5	05-001-MS-ZA	05-001-MS-TA	Ø 3,5	13,2	7,5	7.500	
	05-002-MS-ZA	05-002-MS-TA	Ø 4,0	17,8	9,5		
1,5-2,5	06-001-MS-ZA	06-001-MS-TA	Ø 3,5	17,5	7,1	5.000	
	06-002-MS-ZA	06-002-MS-TA	Ø 4,0	17,2	7,0		
1,5-2,5	05-001-ML-ZA	05-001-ML-TA	Ø 3,5	13,2	7,5	1.000	
	05-002-ML-ZA	05-002-ML-TA	Ø 4,0	17,8	9,5		
1,5-2,5	06-001-ML-ZA	06-001-ML-TA	Ø 3,5	17,5	7,1		
	06-002-ML-ZA	06-002-ML-TA	Ø 4,0	17,2	7,0		

**TECHNICAL SPECIFICATIONS**

**Material:** Brass, with or without tin plating  
**Max. temperature:** 105 °C  
**Max. rated current:** 1,5 mm<sup>2</sup> 10A  
 2,5 mm<sup>2</sup> 15A