

END CONNECTOR - ON STRIP

PART NR.

See dimensions table

MS on strip

ML loose piece



COUNTRY OF ORIGIN

Spain

STANDARDS

REACH and RoHS compliant

PHOTO / TECHNICAL DRAWING

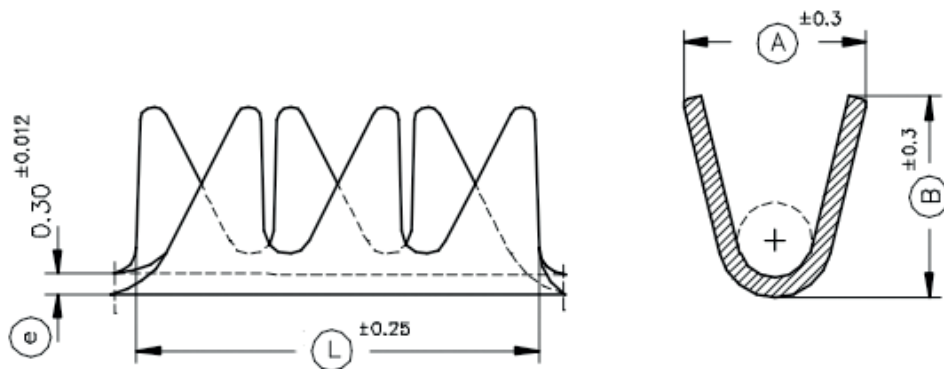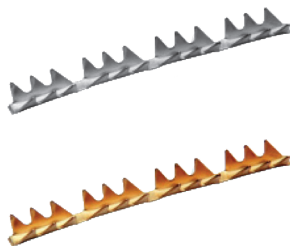

DIMENSIONS

Wire range	Part nr. natural	Part nr. tin plated	L	A	B	Pcs/roll	UL
0,5~0,75	09-001-MS-ZA	09-001-MS-TA	6,0	2,5	2,8	40.000	
0,75~2,0	09-002-MS-ZA	09-002-MS-TA		2,7	3,2		

TECHNICAL SPECIFICATIONS

Material: Brass, with or without tin plating

Max. temperature: Natural 110 °C, tin plated 120 °C

CRIMPING PARAMETERS & PULL-OUT FORCE

Terminal	Wire section (± 10%)	Conductor		Pull-out force (N)
		Height (mm)	Width (mm)	
09-001-MS-xA	0,50 mm ²	1,30 (± 0,03)	1,76 (± 0,03)	56N@60s
	0,75 mm ²	1,40 (± 0,05)	1,82 (± 0,05)	84N@60s
09-002-MS-xA	0,75 mm ²	1,55 (± 0,05)	1,80 (± 0,05)	84N@60s
	1,00 mm ²	1,65 (± 0,05)	1,84 (± 0,05)	108N@60s
	1,50 mm ²	1,75 (± 0,05)	1,84 (± 0,05)	150N@60s
	2,00 mm ²	1,90 (± 0,05)	1,88 (± 0,05)	150N@60s